




**Part Number:** **E162-60**

Revision 20171221 - Generated 2017-Dec-21

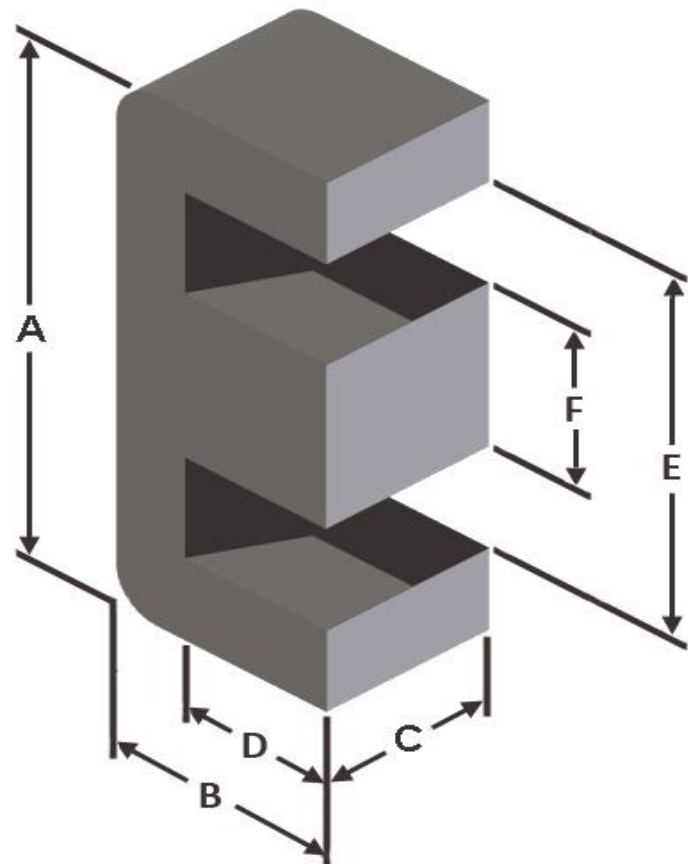

<b>A</b>	41.28 ± 0.38 mm	1.625 ± 0.015 in
<b>B</b>	17.04 ± 0.20 mm	0.671 ± 0.008 in
<b>C</b>	12.70 ± 0.18 mm	0.500 ± 0.007 in
<b>D</b>	10.69 mm (nom.)	0.421 in (nom.)
<b>E</b>	28.58 mm (nom.)	1.125 in (nom.)
<b>F</b>	12.70 ± 0.18 mm	0.500 ± 0.007 in
<b>Mass</b>	(approximate)	41 grams/half
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	1.61 cm <sup>2</sup>
	L <sub>e</sub> - Eff. Mag. Path Length	8.41 cm
	V <sub>e</sub> - Eff. Core Volume	13.6 cm <sup>3</sup>
	WA - Min. Eff. Window Area	1.68 cm <sup>2</sup>
	sa - Surface Area	55.2 cm <sup>2</sup>
	mlt - mean length per turn	8.26 cm
<b>Inductance</b>	μ <sub>i</sub> (reference)	55
	A <sub>L</sub> value (nominal)	149 nH/N <sup>2</sup>
	Test Winding	N=100, #20 AWG
	Frequency	10 kHz
	Voltage on Agilent 4284A	0.71 V
	A <sub>L</sub> tolerance	±10%
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$	
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=5.30E+08, b=1.40E+08, c=1.20E+06, d=2.70E-14	
	B <sub>pk</sub>	140 G
	frequency	100 kHz
	Core Loss (nominal)	52 mW/cm <sup>3</sup>
Core Loss (maximum)	59 mW/cm <sup>3</sup>	
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and: a=1.00E-02, b=1.94E-05, c=1.36, d=0.00	
	H <sub>DC</sub>	100 Oe
	Percent Initial Perm(nom.)	49.3%
Percent Initial Perm(min.)	43.2%	
<b>Coating/Pkg</b>	Coating Type:	None, Brown/Black Stripes
	Voltage Breakdown (min.)	N/A
	Limit	N/A
	Package Quantity	300 Halves/Box

<b>Winding Table</b>	<b>Wire Size</b>	AWG	10	12	14	16	18	20	22	24	26	28	30
		mm	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250
	<b>Full Winding</b>	Turns	14	22	34	52	80	124	193	298	461	714	1,105
	Rdc(Ω)		3.8 m	9.4 m	23.2 m	56.5 m	138.2 m	340.6 m	843.0 m	2.1	5.1	12.5	30.9

