




**Part Number:** EMS-0722819-060

Revision 20161027 - Generated 2016-Nov-02

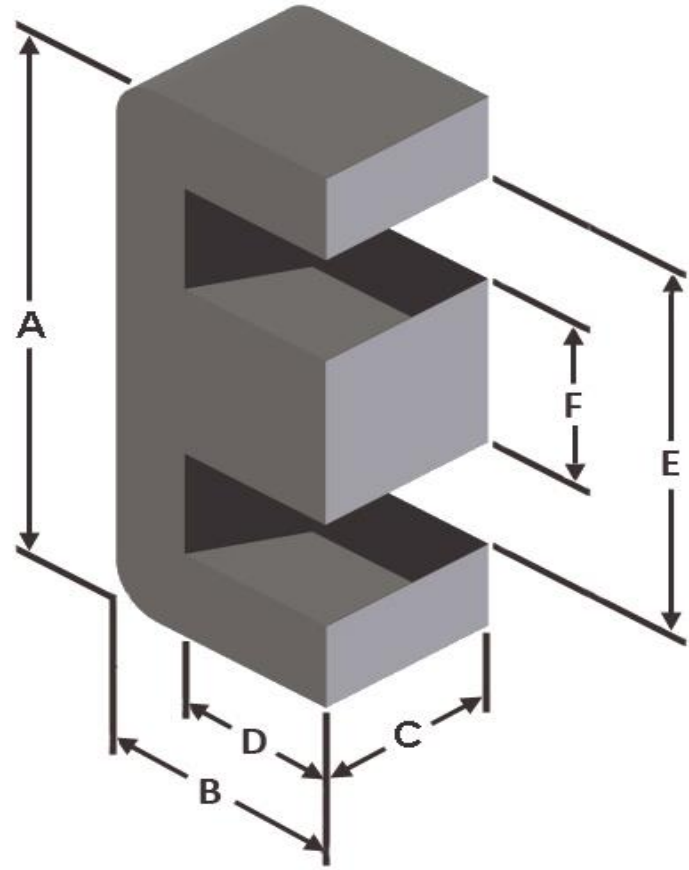

<b>A</b>	72.4 ± 1.09 mm	2.850 ± 0.043 in
<b>B</b>	27.9 ± 0.41 mm	1.098 ± 0.016 in
<b>C</b>	19.1 ± 0.38 mm	0.752 ± 0.015 in
<b>D</b>	17.8 mm (min.)	0.701 in (min.)
<b>E</b>	52.6 mm (min.)	2.071 in (min.)
<b>F</b>	19.1 ± 0.38 mm	0.752 ± 0.015 in
<b>Mass</b>	(approximate)	150 grams/half
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	3.68 cm <sup>2</sup>
	L <sub>e</sub> - Eff. Mag. Path Length	13.7 cm
	V <sub>e</sub> - Eff. Core Volume	50.3 cm <sup>3</sup>
	WA - Min. Eff. Window Area	5.90 cm <sup>2</sup>
	sa - Surface Area	159 cm <sup>2</sup>
	mlt - mean length per turn	14.3 cm
<b>Inductance</b>	μ <sub>i</sub> (reference)	60
	A <sub>L</sub> value (nominal)	236 nH/N <sup>2</sup>
	Test Winding	N=100, #16 AWG
	Frequency	10 kHz
	Voltage on Agilent 4284A	1.6 V
	A <sub>L</sub> tolerance	±8%
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$	
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=7.89E+09, b=7.11E+08, c=8.98E+06, d=2.85E-14	
	B <sub>pk</sub>	1000 G
	frequency	50 kHz
	Core Loss (nominal)	323 mW/cm <sup>3</sup>
Core Loss (maximum)	372 mW/cm <sup>3</sup>	
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and: a=0.01, b=4.47E-06, c=1.74, d=0.00	
	H <sub>DC</sub>	100 Oe
	Percent Initial Perm(nom.)	42.2%
Percent Initial Perm(min.)	34.7%	
<b>Coating/Pkg</b>	Coating Type:	None
	Voltage Breakdown (min.)	N/A
	Limit	N/A
	Package Quantity	60 Halves/Box

<b>Winding Table</b>	<b>Wire Size</b>	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	<b>Full Winding</b>	Turns	32	49	76	118	182	282	437	676	1,047	1,620	2,507
		Rdc(Ω)	9.4 m	23.0 m	56.7 m	140.0 m	343.3 m	846.0 m	2.1	5.1	12.6	31.1	76.5

