




Mix: **-61**


Revision 20190524 - Generated 2019-May-24

μ_i (reference)	38
Typical AL tolerance	$\pm 10\%$
Color Code	Brown/Gray
Density	6.1 g/cm ³
Bsat	14.4kG
Core Loss (100kHz, 140g)	69 mW/cm ³ (nom) 79 mW/cm ³ (max)
%Perm at DC Bias (100 Oe)	68.8% (nom) 63.1% (min)

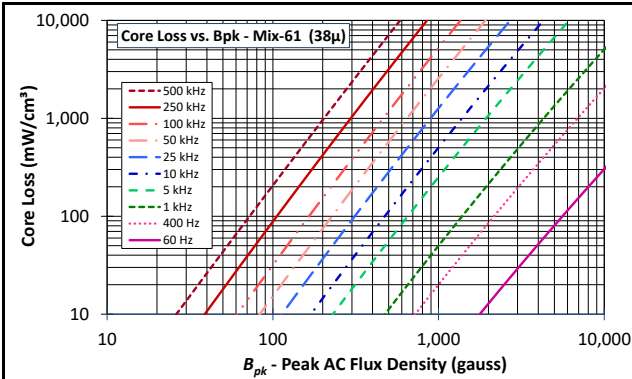

$$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$$


where B_{pk} expressed in gauss, f expressed in hertz, and:
 $a=4.00E+08$, $b=1.10E+08$, $c=5.10E+05$, $d=2.40E-14$

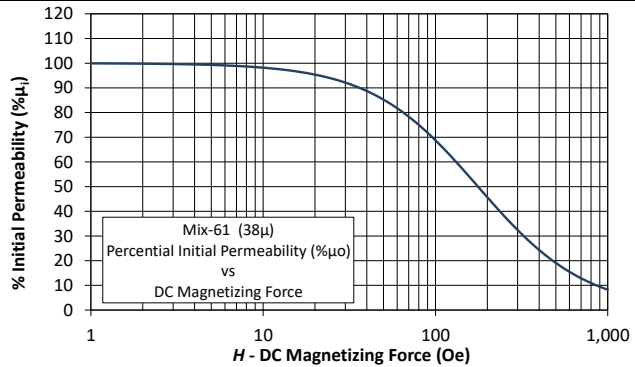

$$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$$

where H expressed in oersteds, and:

$a=1.00E-02$, $b=7.60E-06$, $c=1.39$, $d=0.00$

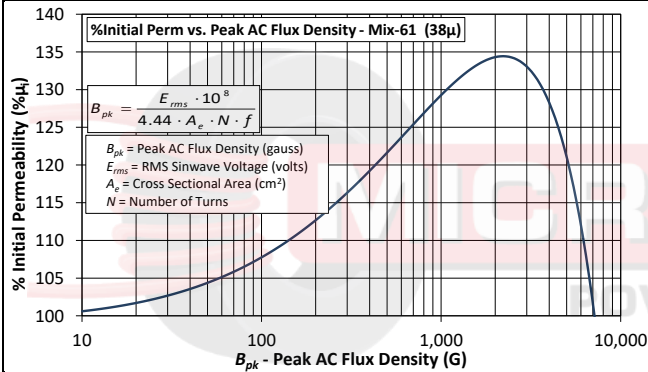


$$B_{pk} = \frac{E_{rms} \cdot 10^8}{4.44 \cdot A_e \cdot N \cdot f}$$

B_{pk} = Peak AC Flux Density (gauss)
 E_{rms} = RMS Sinwave Voltage (volts)
 A_e = Cross Sectional Area (cm²)
 N = Number of Turns

$$\% \mu_i = \frac{1}{a + bB_{pk}^c} + \frac{1}{dB_{pk}^e} + \frac{1}{f}$$

where B_{pk} expressed in gauss, and:


$a=1.97E+02$, $b=3.67E+00$, $c=5.89E-01$, $d=5.72E+11$, $e=-2.45E+00$, $f=1.90E+02$

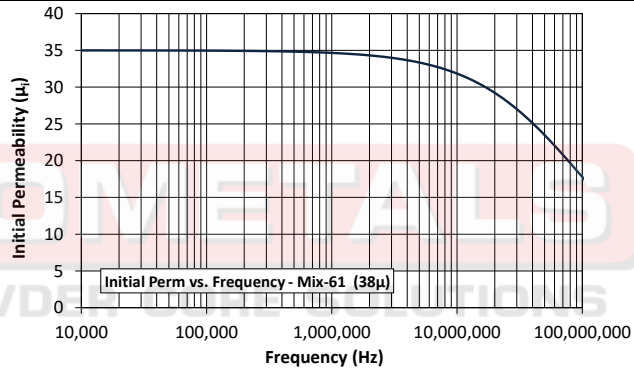

$$\mu_i = \frac{1}{a + bf^c} + d$$

where f expressed in hertz, and:


$a=2.94E-02$, $b=2.96E-10$, $c=1.00E+00$, $d=1.00E+00$

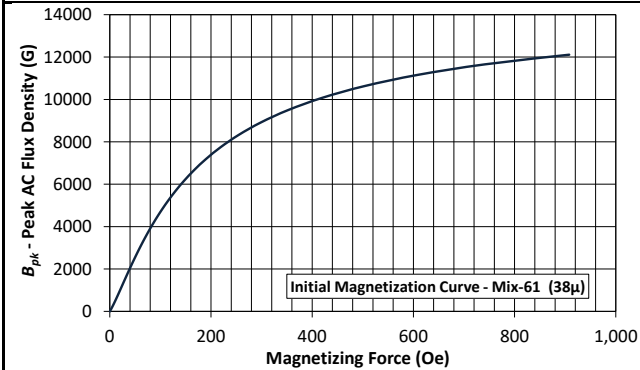

$$B_{pk} = \frac{\mu_i}{H + aH^b + \frac{1}{cH^d} + \frac{1}{e}}$$

where B_{pk} expressed in gauss, H in oested, and:

$a=8.80E-02$, $b=1.69E+00$, $c=2.24E+01$, $d=6.33E-01$, $e=4.11E+02$

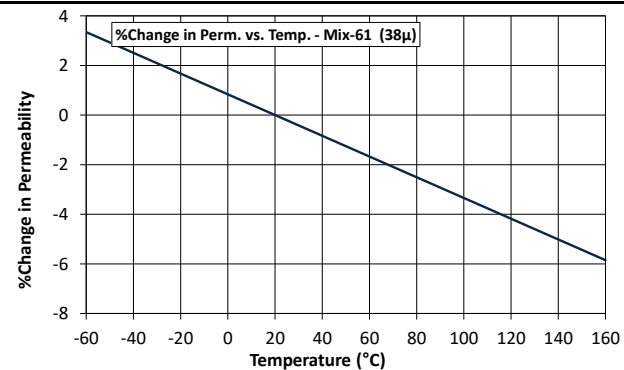

$$\left(\frac{\Delta \mu_i}{\mu_i} \right) ppm = a(T - 20)$$

where T expressed in celsius, and:

$a=-418$