




**Part Number:** **SH-027026-8**

Revision 20170403 - Generated 2017-Apr-03

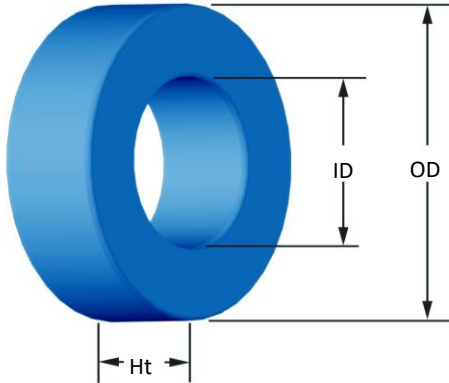

<b>OD</b>	(nom. - bare core) (max. - after coating)	6.60 mm 7.24 mm	0.260 in 0.285 in										
<b>ID</b>	(nom. - bare core) (min. - after coating)	2.67 mm 2.29 mm	0.105 in 0.090 in										
<b>Ht</b>	(nom. - bare core) (max. - after coating)	2.54 mm 3.18 mm	0.100 in 0.125 in										
<b>Mass</b>	(approximate)	0.33 grams											
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	0.0467 cm <sup>2</sup>											
	L <sub>e</sub> - Eff. Mag. Path Length	1.36 cm											
	V <sub>e</sub> - Eff. Core Volume	0.0640 cm <sup>3</sup>											
	WA - Min. Eff. Window Area	0.0412 cm <sup>2</sup>											
	sa - Surface Area	1.83 cm <sup>2</sup>											
	mlt - mean length per turn	1.25 cm											
<b>Inductance</b>	μ <sub>i</sub> (reference)	26											
	A <sub>L</sub> value (nominal)	11 nH/N <sup>2</sup>											
	Test Winding	N=35, #32 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	0.007 V											
	AL tolerance	±12%											
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=3.287E+08, c=5.779E+06, d=1.240E-14												
	B <sub>pk</sub>	500 G											
	frequency	100 kHz											
	Core Loss (nominal)	277 mW/cm <sup>3</sup>											
Core Loss (maximum)	318 mW/cm <sup>3</sup>												
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=1.000E-02, b=1.042E-06, c=1.701, d=0.000												
	H <sub>0c</sub>	200 Oe											
	Percent Initial Perm.(nom.)	53.9%											
Percent Initial Perm.(min.)	46.1%												
<b>Coating/Pkg</b>	Coating Type:	Parylene N											
	Voltage Breakdown (min.)	500 Vrms											
	Limit	0.1 mA, 5 s											
	Package Quantity	21,600 Pcs/Box											
<b>Winding Table</b>	<b>Wire Size</b>	AWG	26	28	30	32	34	36	38	40	42	44	-
		mm	0.400	0.315	0.250	0.200	0.160	0.125	0.100	0.080	0.063	0.050	-
	<b>Single Layer</b>	Turns	11	14	19	24	30	38	49	61	77	96	-
		Rdc(Ω)	18.3 m	37.1 m	80.1 m	160.9 m	319.9 m	644.5 m	1.3	2.6	5.3	10.4	-
<b>Full Winding</b>	Turns	11	17	26	41	63	98	151	234	362	560	-	
	Rdc(Ω)	18.3 m	45.1 m	109.6 m	274.9 m	671.8 m	1.7	4.1	10.0	24.7	60.8	-	

