




Part Number:

SH-090125-2

Revision 20170403 - Generated 2017-Apr-03

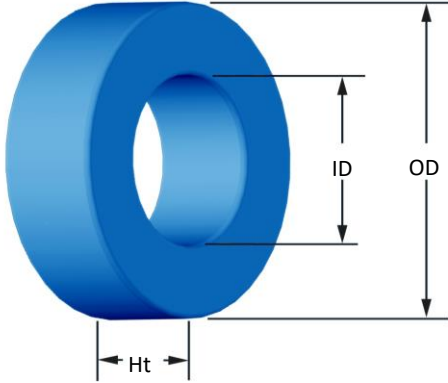

OD	(nom. - bare core) (max. - after coating)	22.86 mm 23.62 mm	0.900 in 0.930 in										
ID	(nom. - bare core) (min. - after coating)	13.97 mm 13.39 mm	0.550 in 0.527 in										
Ht	(nom. - bare core) (max. - after coating)	7.62 mm 8.38 mm	0.300 in 0.330 in										
Mass	(approximate)	11 grams											
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.331 cm ²											
	L _e - Eff. Mag. Path Length	5.67 cm											
	V _e - Eff. Core Volume	1.88 cm ³											
	WA - Min. Eff. Window Area	1.41 cm ²											
	sa - Surface Area	19.8 cm ²											
	mlt - mean length per turn	3.37 cm											
Inductance	μ _i (reference)	125											
	A _L value (nominal)	90 nH/N ²											
	Test Winding	N=80, #26 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	0.12 V											
	AL tolerance	±8%											
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=7.985E+09, b=1.378E+09, c=4.041E+06, d=7.891E-15												
	B _{pk}	1000 G											
	frequency	50 kHz											
	Core Loss (nominal)	240 mW/cm ³											
Core Loss (maximum)	276 mW/cm ³												
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=1.000E-02, b=3.265E-05, c=1.587, d=0.000												
	H _{0c}	40 Oe											
	Percent Initial Perm.(nom.)	46.8%											
Percent Initial Perm.(min.)	39.7%												
Coating/Pkg	Coating Type:	Blue Epoxy											
	Voltage Breakdown (min.)	1000 Vrms											
	Limit	0.1 mA, 5 s											
	Package Quantity	1,210 Pcs/Box											
Winding Table	Wire Size	AWG	10	12	14	16	18	20	22	24	26	28	30
		mm	2.50	2.00	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250
	Single Layer	Turns	11	15	19	24	31	39	50	62	78	98	123
		Rdc(Ω)	1.2 m	2.6 m	5.3 m	10.6 m	21.8 m	43.7 m	89.1 m	175.8 m	351.6 m	702.7 m	1.4
	Full Winding	Turns	11	18	27	42	65	101	157	243	376	581	900
		Rdc(Ω)	1.2 m	3.2 m	7.5 m	18.6 m	45.8 m	113.2 m	279.8 m	688.8 m	1.7	4.2	10.3

