




Part Number:

SH-133060-2

Revision 20170403 - Generated 2017-Apr-03

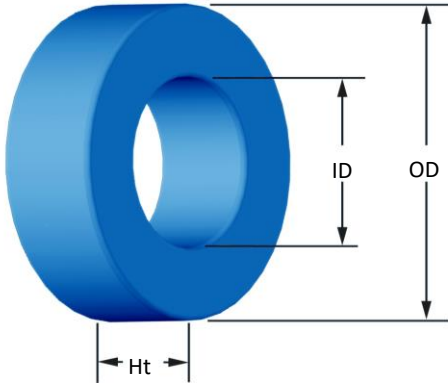

OD	(nom. - bare core) (max. - after coating)	33.02 mm 33.83 mm	1.300 in 1.332 in										
ID	(nom. - bare core) (min. - after coating)	19.94 mm 19.30 mm	0.785 in 0.760 in										
Ht	(nom. - bare core) (max. - after coating)	14.00 mm 15.00 mm	0.551 in 0.591 in										
Mass	(approximate)	40 grams											
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.874 cm ²											
	L _e - Eff. Mag. Path Length	8.15 cm											
	V _e - Eff. Core Volume	7.12 cm ³											
	WA - Min. Eff. Window Area	2.93 cm ²											
	sa - Surface Area	44.3 cm ²											
	mlt - mean length per turn	5.42 cm											
Inductance	μ _i (reference)	60											
	A _L value (nominal)	80 nH/N ²											
	Test Winding	N=70, #22 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	0.27 V											
	AL tolerance	±8%											
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=8.801E+08, c=5.421E+06, d=1.033E-14												
	B _{pk}	1000 G											
	frequency	50 kHz											
	Core Loss (nominal)	317 mW/cm ³											
Core Loss (maximum)	365 mW/cm ³												
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=1.000E-02, b=7.724E-06, c=1.612, d=0.000												
	H _{0c}	100 Oe											
	Percent Initial Perm(nom.)	43.6%											
Percent Initial Perm(min.)	36.5%												
Coating/Pkg	Coating Type:	Blue Epoxy											
	Voltage Breakdown (min.)	1000 Vrms											
	Limit	0.1 mA, 5 s											
	Package Quantity	384 Pcs/Box											
Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	14	18	22	29	36	46	58	73	91	114	142
		Rdc(Ω)	1.6 m	3.2 m	6.2 m	13.0 m	25.7 m	52.1 m	104.6 m	209.3 m	414.9 m	826.6 m	1.6
Full Winding	Turns	15	24	37	57	88	136	211	326	504	780	1,208	
	Rdc(Ω)	1.7 m	4.3 m	10.4 m	25.5 m	62.7 m	154.2 m	380.4 m	934.6 m	2.3	5.7	13.9	

