








Part Number: EFS-0802420-014

Revision 20180523 - Generated 2018-May-23

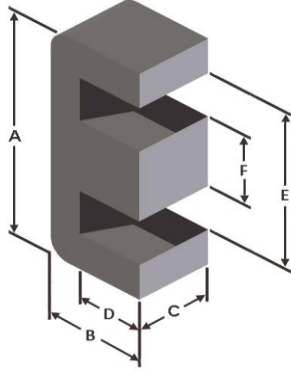

A	80 ± 1.19 mm	3.150 ± 0.047 in											
B	24.05 ± 0.58 mm	0.947 ± 0.023 in											
C	19.8 ± 0.41 mm	0.780 ± 0.016 in											
D	14.05 mm (min.)	0.553 in (min.)											
E	59.3 mm (min.)	2.335 in (min.)											
F	19.8 ± 0.41 mm	0.780 ± 0.016 in											
Mass	(approximate)	140 grams/half											
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	3.89 cm ²											
	L _e - Eff. Mag. Path Length	12.88 cm											
	V _e - Eff. Core Volume	50.1 cm ³											
	WA - Min. Eff. Window Area	5.49 cm ²											
	sa - Surface Area	162 cm ²											
	mlt - mean length per turn	15.8 cm											
Inductance	μ _i (reference)	14											
	A _i value (nominal)	91 nH/N ²											
	Test Winding	N=100, #16 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	1.7 V											
	A _i tolerance	±8%											
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{a} + \frac{b}{B_{pk}^3} + \frac{c}{B_{pk}^{2.3}} + \frac{d}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.00E+06, b=2.03E+08, c=3.14E+06, d=2.04E-15												
	B _{pk}	300 G											
	frequency	100 kHz											
	Core Loss (nominal)	152 mW/cm ³											
	Core Loss (maximum)	175 mW/cm ³											
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=0.01, b=6.29E-07, c=1.49, d=0.00												
	H _{dc}	200 Oe											
	Percent Initial Perm(nom.)	85.6%											
	Percent Initial Perm(min.)	81.9%											
Coating/Pkg	Coating Type:	None											
	Voltage Breakdown (min.)	N/A											
	Limit	N/A											
	Package Quantity	84 Halves/Box											
Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Full Winding	Turns	30	46	71	110	170	263	407	630	975	1,509	2,336
	Rdc(Ω)	9.8 m	23.8 m	58.4 m	143.9 m	353.8 m	870.4 m	2.1	5.3	13.0	31.9	78.7	

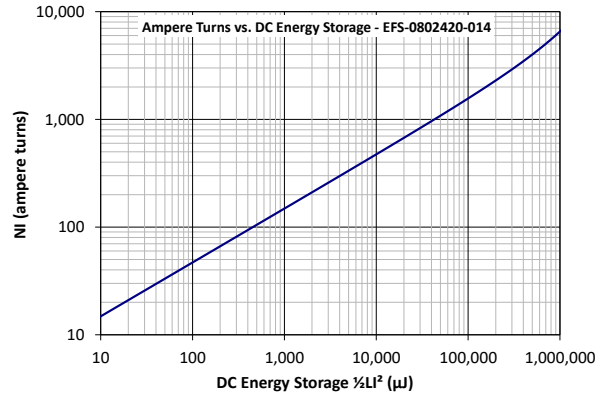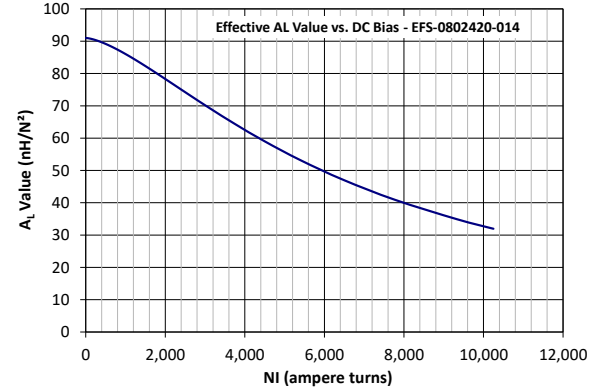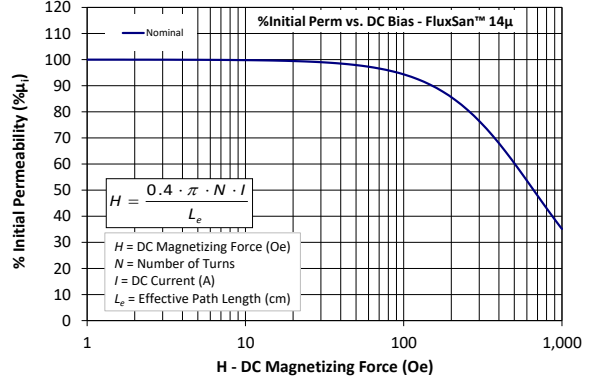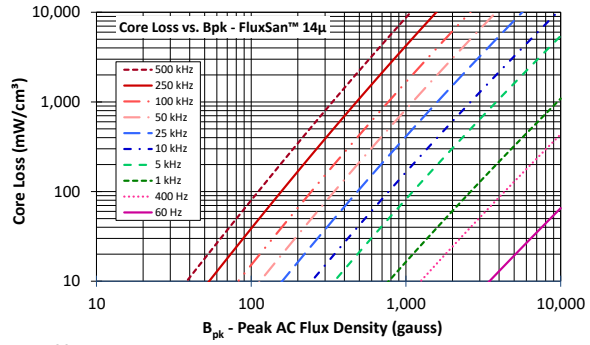

Handling and Storage: Cores should be stored in the original unopened packaging between -10°C and +50°C and less than 60% relative humidity. After the original packaging is opened, the cores should be stored between -8°C and +25°C less than 30% relative humidity. Gloves should be used when handling uncoated cores. The cores should also be sheltered from rain, moisture, salt water, salt air, plasters, ashes, sulfur, sulfur dioxide, ammonia sulfates, soils, acids, metals shavings, and solvents.

Operating Temperature: Cores can be used continuously at operating temperatures between -60°C and +200°C.

RoHS 2.0, REACH and ISO (TS16949, ISO 9001, ISO 14001) compliant. Statements available for download at www.micrometalsapc.com.