




Part Number: **FS-133026-2**

Revision 20190626 - Generated 2019-Jun-27

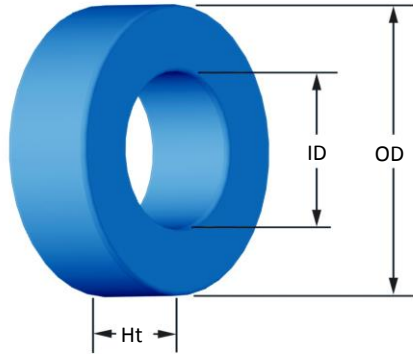

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	33.02 mm 33.83 mm	1.300 in 1.332 in
ID	(nom. - bare core) (min.)	19.94 mm 19.30 mm	0.785 in 0.760 in
HT	(nom. - bare core) (max.)	14.00 mm 15.00 mm	0.551 in 0.591 in
Mass	(approximate)	45 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section L _e - Eff. Mag. Path Length V _e - Eff. Core Volume WA - Min. Eff. Window Area sa - Surface Area mlt - mean length per turn	0.874 cm ² 8.15 cm 7.12 cm ³ 2.93 cm ² 44.3 cm ² 5.42 cm	
Inductance	μ _i (reference) A _l value (nominal) Test Winding Frequency Voltage on Agilent 4284A AL tolerance	26 34.7 nH/N ² N=70, #22 AWG 10 kHz 0.27 V ±8%	
Core Loss	Core Loss(mW/cm ³): $\frac{f}{B_{pk}^3} + \frac{c}{B_{pk}^{2.3}} + \frac{d}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$ where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=1.812E+08, c=3.251E+06, d=6.158E-14 B _{pk} frequency Core Loss (nominal) Core Loss (maximum)	 300 G 100 kHz 214 mW/cm ³ 246 mW/cm ³	
DC Saturation	%μ _i $\frac{1}{a + b \cdot H^c} + d$ where H expressed in oersteds, and: a=1.000E-02, b=9.210E-08, c=1.912, d=0.000 H _{DC} Percent Initial Perm.(nom.) Percent Initial Perm.(min.)	 200 Oe 81.2% 75.3%	
Coating/Pkg	Coating Type: Voltage Breakdown (min.) Limit Package Quantity	Blue Epoxy 1000 Vrms 0.1 mA, 5 s 384 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	14	18	22	29	36	46	58	73	91	114	142
		Rdc(Ω)	1.6 m	3.2 m	6.2 m	13.0 m	25.7 m	52.1 m	104.6 m	209.3 m	414.9 m	826.6 m	1.6
	Full Winding	Turns	15	24	37	57	88	136	211	326	504	780	1,208
		Rdc(Ω)	1.7 m	4.3 m	10.4 m	25.5 m	62.7 m	154.2 m	380.4 m	934.6 m	2.3	5.7	13.9

