




Part Number: **MS-250040-2**
 Revision 20161018 - Generated 2016-Oct-26

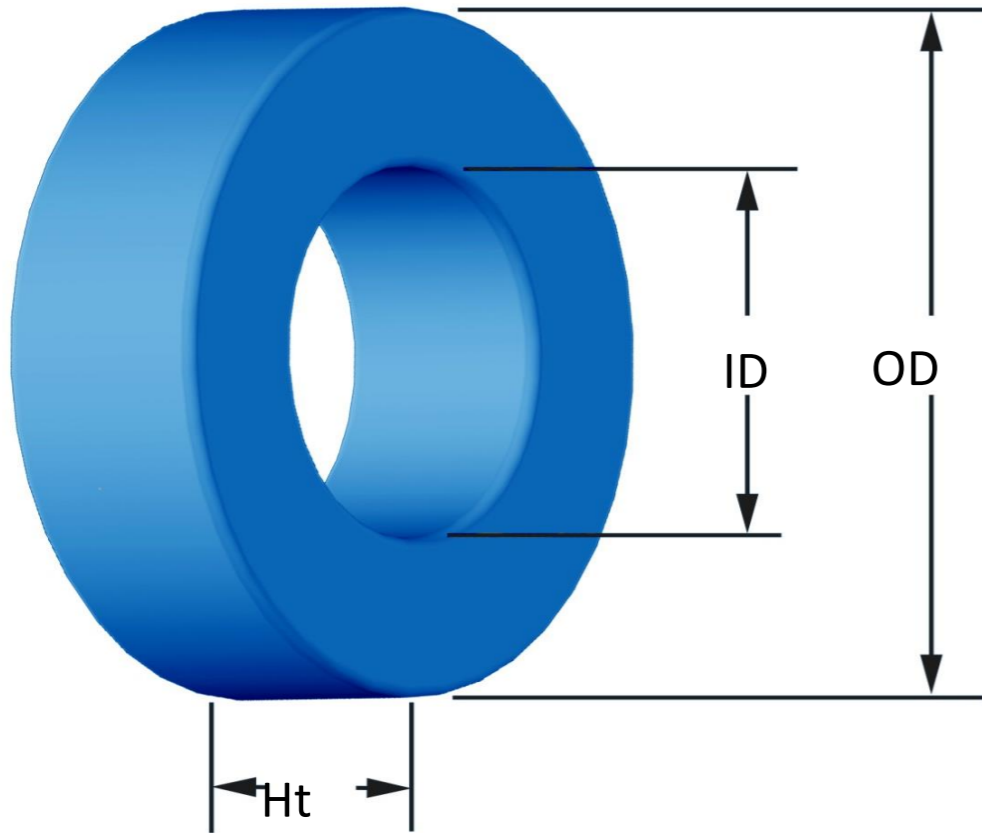

| | | | |
|----------------------------|---|---|---|
| OD | (nom. - bare core) (max. - after coating) | 63.50 mm 64.77 mm | 2.500 in 2.550 in |
| ID | (nom. - bare core) (min. - after coating) | 31.37 mm 30.48 mm | 1.235 in 1.200 in |
| Ht | (nom. - bare core) (max. - after coating) | 25.00 mm 25.90 mm | 0.984 in 1.020 in |
| Mass | (approximate) | 300 grams | |
| Magnetic Dimensions | A _e - Eff. Mag. Cross Section | 3.89 cm ² | |
| | L _e - Eff. Mag. Path Length | 14.314 cm | |
| | V _e - Eff. Core Volume | 55.8 cm ³ | |
| | WA - Min. Eff. Window Area | 7.30 cm ² | |
| | sa - Surface Area | 150 cm ² | |
| | mlt - mean length per turn | 10.1 cm | |
| | Inductance | μ _i (reference) A _L value (nominal) Test Winding Frequency Voltage on Agilent 4284A AL tolerance | 40 137 nH/N ² N=100, #18 AWG 10 kHz 1.7 V ±8% |
| Core Loss | $\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$ <p>where B_{pk} expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=6.961E+08, c=5.397E+06, d=4.127E-14</p> | | |
| | B _{pk} | 1000 G | |
| | frequency | 50 kHz | |
| | Core Loss (nominal) | 441 mW/cm ³ | |
| | Core Loss (maximum) | 507 mW/cm ³ | |
| DC Saturation | $\% \mu_i = \frac{1}{a + b \cdot H^c} + d$ <p>where H expressed in oersteds, and: a=1.000E-02, b=2.655E-06, c=1.703, d=0.000</p> | | |
| | H _{DC} | 100 Oe | |
| | Percent Initial Perm(nom.) | 59.6% | |
| | Percent Initial Perm(min.) | 52.0% | |
| Coating/Pkg | Coating Type: | Blue Epoxy | |
| | Voltage Breakdown (min.) | 1000 Vrms | |
| | Limit | 0.1 mA, 5 s | |
| | Package Quantity | 27 Pcs/Box | |

| | | | | | | | | | | | | | |
|----------------------|---------------------|--------|--------|--------|---------|---------|---------|---------|---------|---------|-------|-------|-------|
| Winding Table | Wire Size | AWG | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 |
| | | mm | 3.150 | 2.500 | 2.000 | 1.600 | 1.250 | 1.000 | 0.800 | 0.630 | 0.500 | 0.400 | 0.315 |
| | Single Layer | Turns | 23 | 29 | 37 | 47 | 59 | 74 | 93 | 116 | 145 | 182 | 227 |
| | | Rdc(Ω) | 4.8 m | 9.6 m | 19.5 m | 39.4 m | 78.6 m | 156.9 m | 313.5 m | 622.0 m | 1.2 | 2.5 | 4.9 |
| Full Winding | Turns | 38 | 59 | 91 | 142 | 219 | 339 | 525 | 813 | 1,258 | 1,947 | 3,013 | |
| | Rdc(Ω) | 7.9 m | 19.6 m | 48.0 m | 119.0 m | 291.9 m | 718.6 m | 1.8 | 4.4 | 10.7 | 26.4 | 65.0 | |

