




Part Number:

**SH-025125-8**

Revision 20170403 - Generated 2017-Apr-03

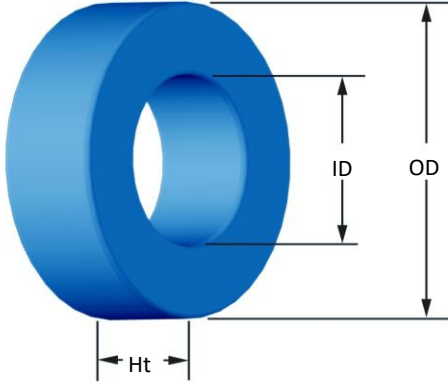

<b>OD</b>	(nom. - bare core) (max. - after coating)	6.35 mm 6.99 mm	0.250 in 0.275 in										
<b>ID</b>	(nom. - bare core) (min. - after coating)	2.79 mm 2.29 mm	0.110 in 0.090 in										
<b>Ht</b>	(nom. - bare core) (max. - after coating)	2.79 mm 3.43 mm	0.110 in 0.135 in										
<b>Mass</b>	(approximate)	0.37 grams											
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	0.0476 cm <sup>2</sup>											
	L <sub>e</sub> - Eff. Mag. Path Length	1.36 cm											
	V <sub>e</sub> - Eff. Core Volume	0.0642 cm <sup>3</sup>											
	WA - Min. Eff. Window Area	0.0412 cm <sup>2</sup>											
	sa - Surface Area	1.80 cm <sup>2</sup>											
	mlt - mean length per turn	1.27 cm											
<b>Inductance</b>	μ <sub>i</sub> (reference)	125											
	A <sub>L</sub> value (nominal)	52 nH/N <sup>2</sup>											
	Test Winding	N=30, #32 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	0.006 V											
	AL tolerance	±12%											
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=7.985E+09, b=1.378E+09, c=4.041E+06, d=7.891E-15												
	B <sub>pk</sub>	1000 G											
	frequency	50 kHz											
	Core Loss (nominal)	240 mW/cm <sup>3</sup>											
Core Loss (maximum)	276 mW/cm <sup>3</sup>												
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=1.000E-02, b=3.265E-05, c=1.587, d=0.000												
	H <sub>0c</sub>	40 Oe											
	Percent Initial Perm.(nom.)	46.8%											
Percent Initial Perm.(min.)	39.7%												
<b>Coating/Pkg</b>	Coating Type:	Parylene N											
	Voltage Breakdown (min.)	500 Vrms											
	Limit	0.1 mA, 5 s											
	Package Quantity	21,600 Pcs/Box											
<b>Winding Table</b>	<b>Wire Size</b>	AWG	26	28	30	32	34	36	38	40	42	44	-
		mm	0.400	0.315	0.250	0.200	0.160	0.125	0.100	0.080	0.063	0.050	-
	<b>Single Layer</b>	Turns	11	14	19	24	30	38	49	61	77	96	-
		Rdc(Ω)	18.7 m	37.9 m	81.7 m	164.2 m	326.3 m	657.4 m	1.3	2.7	5.4	10.6	-
<b>Full Winding</b>	Turns	11	17	26	41	63	98	151	234	362	560	-	
	Rdc(Ω)	18.7 m	46.0 m	111.8 m	280.4 m	685.3 m	1.7	4.2	10.2	25.2	62.0	-	

