




Part Number: **T12-0A**

Revision 20190524 - Generated 2019-May-30

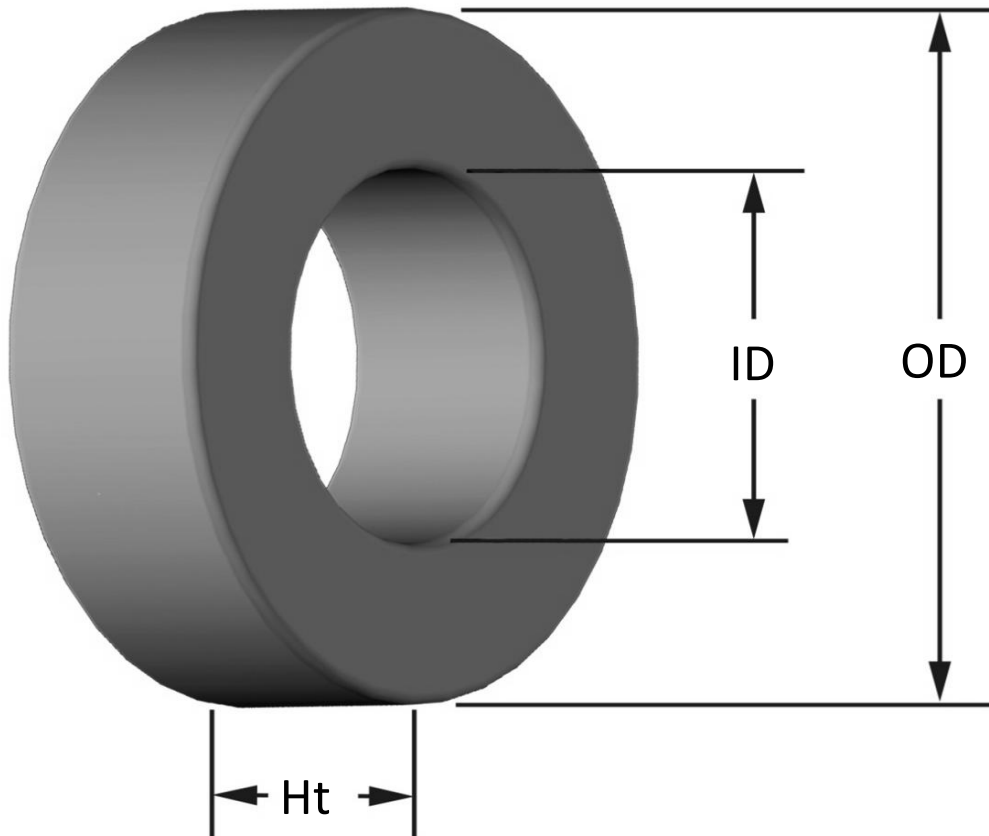

OD	(nom. - bare core) (max. - after coating)	3.18 mm 3.30 mm	0.125 in 0.130 in
ID	(nom. - bare core) (min. - after coating)	1.57 mm 1.45 mm	0.062 in 0.057 in
Ht	(nom. - bare core) (max. - after coating)	0.76 mm 0.89 mm	0.030 in 0.035 in
Mass	(approximate)	0.01 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.00570 cm ²	
	L _e - Eff. Mag. Path Length	0.750 cm	
	V _e - Eff. Core Volume	0.00430	
	WA - Min. Eff. Window Area	0.0165 cm ²	
	sa - Surface Area	0.336 cm ²	
	mlt - mean length per turn	0.436 cm	
Inductance	μ _i (reference)	1	
	A _L value (nominal)	0.13 nH/N ²	
	Test Winding	N/A	
	Frequency	N/A	
	Voltage on Agilent 4284A	N/A	
	A _L tolerance	Ref Only	
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.00E+99, b=1.00E+99, c=1.00E+99, d=0.00E+00		
	B _{pk}	140 G	
	frequency	100 kHz	
	Core Loss (nominal)	0 mW/cm ³	
	Core Loss (maximum)	0 mW/cm ³	
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.00E-02, b=0.00E+00, c=0.00, d=0.00		
	H _{DC}	200 Oe	
	Percent Initial Perm(nom.)	100.0%	
	Percent Initial Perm(min.)	100.0%	
Coating/Pkg	Coating Type:	Parylene C	
	Voltage Breakdown (min.)	500 Vrms, 60Hz	
	Limit	3 mA, 5 s	
	Package Quantity	250,000 Pcs/Box	

Winding Table	Wire Size	AWG	30	32	34	36	38	40	42	44	#N/A	#N/A	#N/A
		mm	0.250	0.200	0.160	0.125	0.100	0.080	0.063	0.050	#N/A	#N/A	#N/A
	Single Layer	Turns	11	14	18	23	30	38	47	60	#N/A	#N/A	#N/A
		Rdc(Ω)	16.2 m	32.8 m	67.1 m	136.4 m	283.0 m	570.1 m	1.1	2.3	#N/A	#N/A	#N/A
Full Winding	Turns	11	16	25	39	60	93	145	224	#N/A	#N/A	#N/A	
	Rdc(Ω)	16.2 m	37.5 m	93.2 m	231.3 m	566.0 m	1.4	3.5	8.5	#N/A	#N/A	#N/A	

