




**Part Number:** **T12-2B**  
Revision 20160713 - Generated 2016-Aug-15

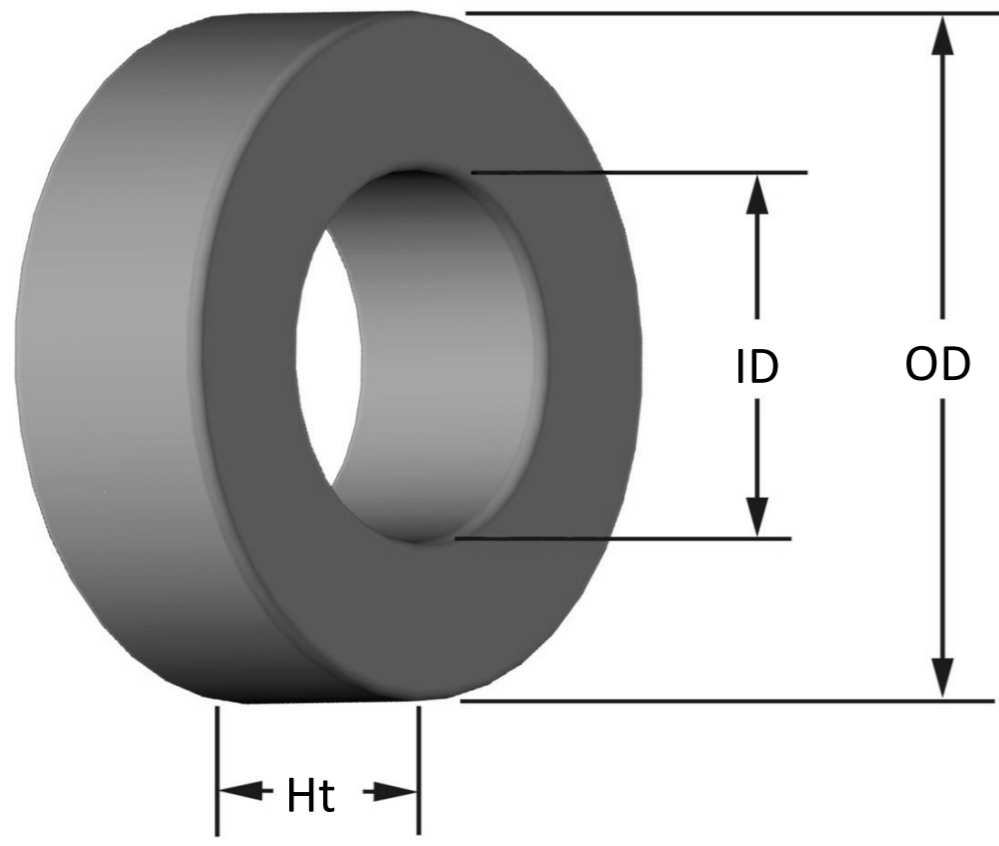

<b>OD</b>	(nom. - bare core) (max. - after coating)	3.18 mm 3.30 mm	0.125 in 0.130 in
<b>ID</b>	(nom. - bare core) (min. - after coating)	1.57 mm 1.45 mm	0.062 in 0.057 in
<b>Ht</b>	(nom. - bare core) (max. - after coating)	1.07 mm 1.19 mm	0.042 in 0.047 in
<b>Mass</b>	(approximate)	0.03 grams	
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	0.00800 cm <sup>2</sup>	
	L <sub>e</sub> - Eff. Mag. Path Length	0.750 cm	
	V <sub>e</sub> - Eff. Core Volume	0.00610	
	WA - Min. Eff. Window Area	0.0165 cm <sup>2</sup>	
	sa - Surface Area	0.371 cm <sup>2</sup>	
	mlt - mean length per turn	0.497 cm	
<b>Inductance</b>	μ <sub>i</sub> (reference)	10	
	A <sub>L</sub> value (nominal)	1.61 nH/N <sup>2</sup>	
	Test Winding	N=25, #36 AWG	
	Frequency	1 MHz	
	Voltage on Agilent 4284A	0.089 V	
A <sub>L</sub> tolerance	±5%		
<b>Core Loss &amp; Q</b>	Core Loss(mW/cm <sup>3</sup> )= $\frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=4.00E+09, b=3.00E+08, c=2.70E+06, d=9.60E-16		
	Q test winding	N=25, #36 AWG	
	Q frequency	12 MHz	
Q min on HP4342A	87		
<b>DC Saturation</b>	%μ <sub>i</sub> = $\frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.00E-02, b=1.83E-07, c=1.46, d=0.00		
	H <sub>DC</sub>	200 Oe	
Percent Initial Perm.(nom.)	95.9%		
Percent Initial Perm.(min.)	94.8%		
<b>Coating/Pkg</b>	Coating Type:	Parylene C	
	Voltage Breakdown (min.)	500 Vrms, 60Hz	
	Limit	0.1 mA, 5 s	
	Package Quantity	250,000 Pcs/Box	

<b>Winding Table</b>	<b>Wire Size</b>	AWG	30	32	34	36	38	40	42	44	#N/A	#N/A	#N/A
		mm	0.250	0.200	0.160	0.125	0.100	0.080	0.063	0.050	#N/A	#N/A	#N/A
	<b>Single Layer</b>	Turns	11	14	18	23	30	38	47	60	#N/A	#N/A	#N/A
		Rdc(Ω)	18.5 m	37.4 m	76.5 m	155.5 m	322.6 m	649.9 m	1.3	2.6	#N/A	#N/A	#N/A
<b>Full Winding</b>	Turns	11	16	25	39	60	93	145	224	#N/A	#N/A	#N/A	
	Rdc(Ω)	18.5 m	42.8 m	106.3 m	263.7 m	645.2 m	1.6	3.9	9.7	#N/A	#N/A	#N/A	

