




**Part Number:** **T20-63**  
Revision 20171221 - Generated 2017-Dec-21

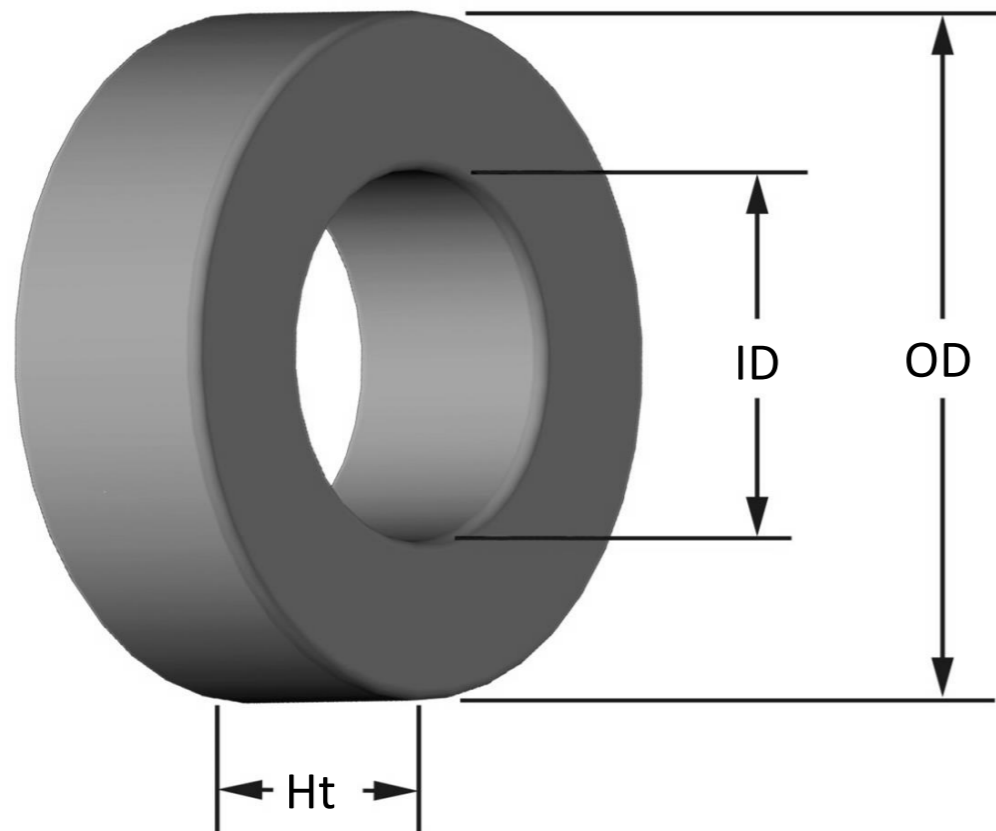

<b>OD</b>	(nom. - bare core)	5.08 mm	0.200 in
	(max. - after coating)	5.33 mm	0.210 in
<b>ID</b>	(nom. - bare core)	2.24 mm	0.088 in
	(min. - after coating)	1.98 mm	0.078 in
<b>Ht</b>	(nom. - bare core)	1.78 mm	0.070 in
	(max. - after coating)	2.03 mm	0.080 in
<b>Mass</b>	(approximate)	0.15 grams	
<b>Magnetic Dimensions</b>	$A_e$ - Eff. Mag. Cross Section	0.0230 cm <sup>2</sup>	
	$L_e$ - Eff. Mag. Path Length	1.15 cm	
	$V_e$ - Eff. Core Volume	0.0260 cm <sup>3</sup>	
	$W_A$ - Min. Eff. Window Area	0.0308 cm <sup>2</sup>	
	$s_a$ - Surface Area	0.962 cm <sup>2</sup>	
	$mlt$ - mean length per turn	0.841 cm	
<b>Inductance</b>	$\mu_i$ (reference)	35	
	$A_L$ value (nominal)	7.8 nH/N <sup>2</sup>	
	Test Winding	N=50, #36 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.005 V	
	$A_L$ tolerance	±10%	
<b>Core Loss</b>	Core Loss(mW/cm <sup>3</sup> )= $\frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$		
	where $B_{pk}$ expressed in gauss, $f$ expressed in hertz, and: $a=9.94E+08$ , $b=2.56E+08$ , $c=1.00E+04$ , $d=3.34E-15$		
	$B_{pk}$	140 G	
	frequency	100 kHz	
	Core Loss (nominal)	31 mW/cm <sup>3</sup>	
Core Loss (maximum)	35 mW/cm <sup>3</sup>		
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: $a=1.00E-02$ , $b=1.29E-05$ , $c=1.24$ , $d=0.00$		
	$H_{DC}$	200 Oe	
	Percent Initial Perm.(nom.)	51.7%	
Percent Initial Perm.(min.)	46.1%		
<b>Coating/Pkg</b>	Coating Type:	Lt. Dust of Brown/Beige w/Parylene C	
	Voltage Breakdown (min.)	500 Vrms, 60Hz	
	Limit	3 mA, 5 s	
	Package Quantity	100,000 Pcs/Box	

<b>Winding Table</b>	<b>Wire Size</b>	AWG	28	30	32	34	36	38	40	42	44	#N/A	#N/A
		mm	0.315	0.250	0.200	0.160	0.125	0.100	0.080	0.063	0.050	#N/A	#N/A
	<b>Single Layer</b>	Turns	12	16	20	26	33	42	52	66	83	#N/A	#N/A
		Rdc(Ω)	21.5 m	45.5 m	90.5 m	187.2 m	377.8 m	764.7 m	1.5	3.0	6.1	#N/A	#N/A
	<b>Full Winding</b>	Turns	13	20	30	47	73	113	175	271	419	#N/A	#N/A
		Rdc(Ω)	23.3 m	56.9 m	135.8 m	338.3 m	835.7 m	2.1	5.1	12.5	30.7	#N/A	#N/A

