




Mix:	-18
-------------	------------


Revision 20190524 - Generated 2019-May-24

μ_i (reference)	55
Typical AL tolerance	$\pm 10\%$
Color Code	Green/Red
Density	6.6 g/cm ³
Bsat	17.8kG
Core Loss (100kHz, 140g)	46 mW/cm ³ (nom) 53 mW/cm ³ (max)
%Perm at DC Bias (100 Oe)	51.4% (nom) 43.9% (min)

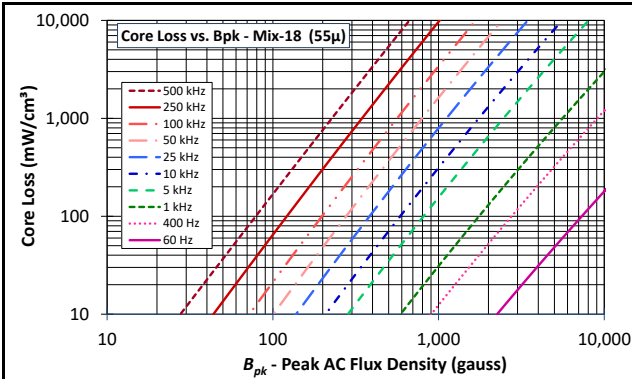

$$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$$


where B_{pk} expressed in gauss, f expressed in hertz, and:
 $a=8.00E+08$, $b=1.70E+08$, $c=9.00E+05$, $d=3.10E-14$

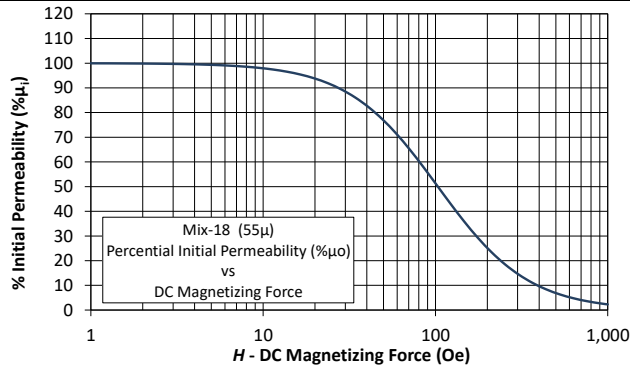

$$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$$

where H expressed in oersteds, and:

$a=1.00E-02$, $b=4.72E-06$, $c=1.65$, $d=0.00$

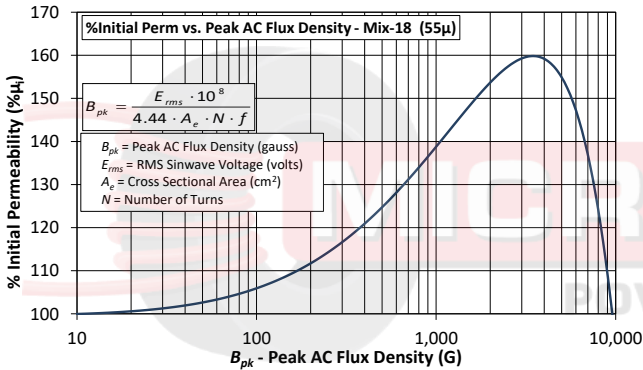


$$B_{pk} = \frac{E_{rms} \cdot 10^8}{4.44 \cdot A_e \cdot N \cdot f}$$

B_{pk} = Peak AC Flux Density (gauss)
 E_{rms} = RMS Sinwave Voltage (volts)
 A_e = Cross Sectional Area (cm²)
 N = Number of Turns

$$\% \mu_i = \frac{1}{a + bB_{pk}^c + \frac{1}{dB_{pk}^e} + \frac{1}{f}}$$

where B_{pk} expressed in gauss, and:


$a=1.84E+02$, $b=2.45E-01$, $c=9.67E-01$, $d=3.53E+10$, $e=-2.06E+00$, $f=2.21E+02$

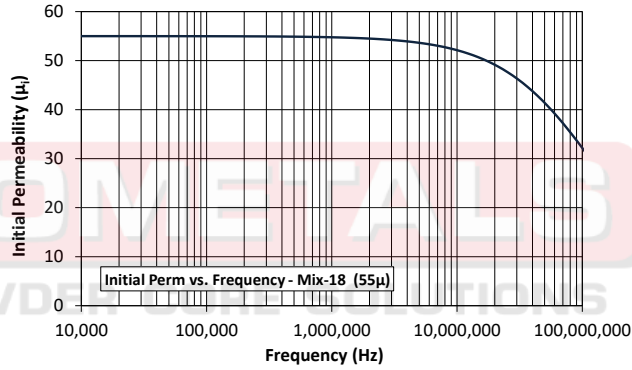

$$\mu_i = \frac{1}{a + bf^c} + d$$

where f expressed in hertz, and:


$a=1.82E-02$, $b=1.70E-11$, $c=1.11E+00$, $d=0.00E+00$

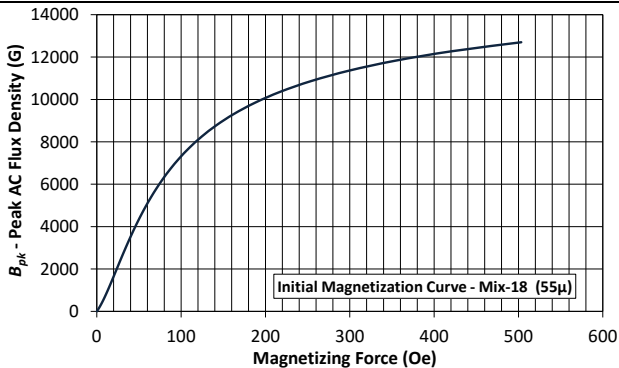

$$B_{pk} = \frac{\mu_i}{\frac{1}{H} + \frac{aH^b}{c} + \frac{1}{d} + \frac{1}{e}}$$

where B_{pk} expressed in gauss, H in oested, and:

$a=6.81E-02$, $b=1.92E+00$, $c=3.25E+01$, $d=5.27E-01$, $e=3.24E+02$

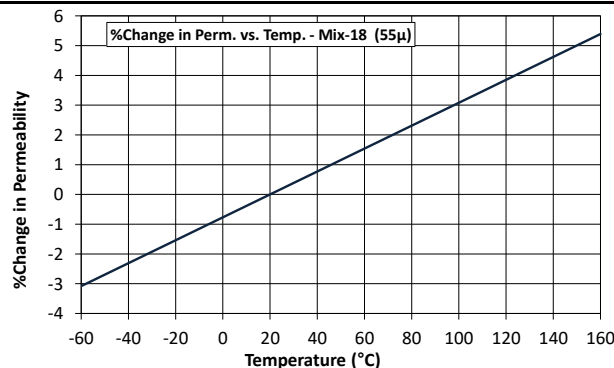

$$\left(\frac{\Delta \mu_i}{\mu_i} \right) ppm = a(T - 20)$$

where T expressed in celsius, and:

$a=385$