




Part Number: MP-068160-2H127
Revision 20160816 - Generated 2016-Aug-16

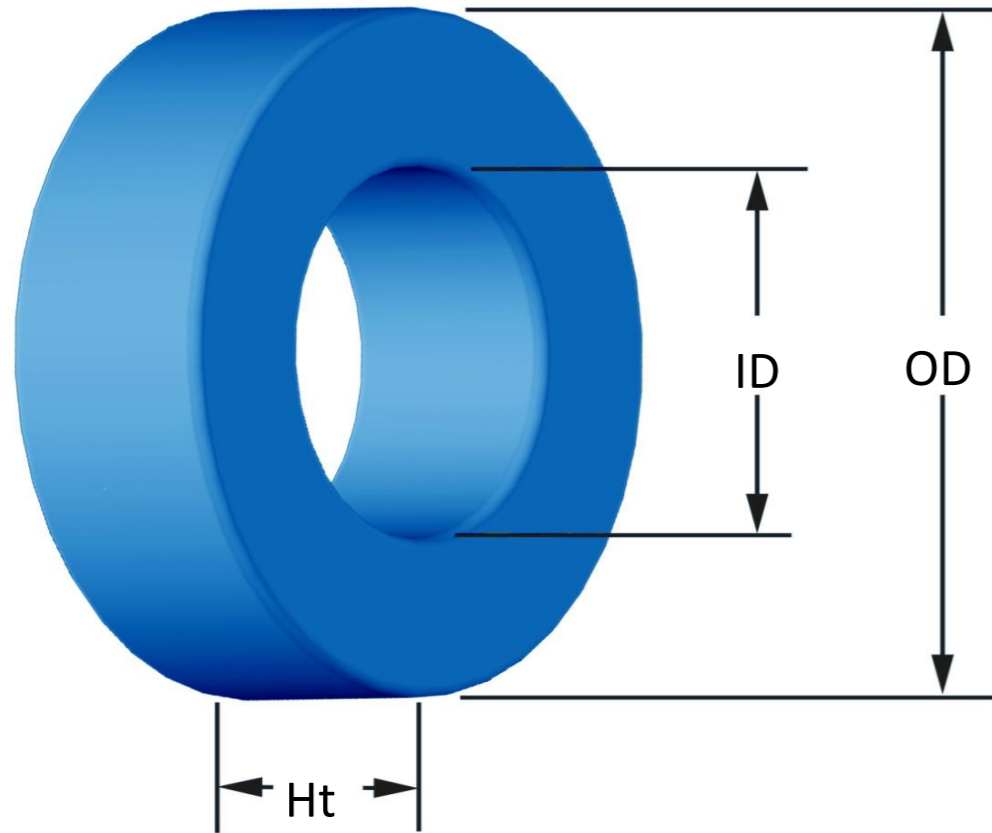

OD	(nom. - bare core) (max. - after coating)	17.27 mm 18.03 mm	0.680 in 0.710 in
ID	(nom. - bare core) (min. - after coating)	9.65 mm 9.02 mm	0.380 in 0.355 in
Ht	(nom. - bare core) (max. - after coating)	12.70 mm 13.46 mm	0.500 in 0.530 in
Mass	(approximate)	15 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.464 cm ²	
	L _e - Eff. Mag. Path Length	4.14 cm	
	V _e - Eff. Core Volume	1.92 cm ³	
	WA - Min. Eff. Window Area	0.639 cm ²	
	sa - Surface Area	15.8 cm ²	
	mlt - mean length per turn	4.04 cm	
Inductance	μ _i (reference)	160	
	A _L value (nominal)	228 nH/N ²	
	Test Winding	N=70, #28 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.14 V	
	AL tolerance	±8%	
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$ <p>where B_{pk} expressed in gauss, f expressed in hertz, and: a=3.167E+10, b=1.206E+09, c=9.656E+06, d=5.636E-14</p>		
	B _{pk}	1000 G	
	frequency	50 kHz	
	Core Loss (nominal)	312 mW/cm ³	
	Core Loss (maximum)	359 mW/cm ³	
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$ <p>where H expressed in oersteds, and: a=1.000E-02, b=1.123E-05, c=1.935, d=0.000</p>		
	H _{DC}	40 Oe	
	Percent Initial Perm.(nom.)	41.4%	
	Percent Initial Perm.(min.)	33.2%	
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	900 Pcs/Box	

Winding Table	Wire Size	AWG	14	16	18	20	22	24	26	28	30	32	34
		mm	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250	0.200	0.160
	Single Layer	Turns	12	15	20	26	32	41	52	65	82	102	128
		Rdc(Ω)	4.0 m	8.0 m	16.9 m	35.0 m	68.5 m	139.5 m	281.4 m	559.5 m	1.1	2.2	4.4
Full Winding	Turns	12	19	30	46	71	110	170	264	408	632	978	
	Rdc(Ω)	4.0 m	10.1 m	25.4 m	61.9 m	151.9 m	374.3 m	920.1 m	2.3	5.6	13.8	33.9	

