




Part Number:

**SH-044125-2**

Revision 20170403 - Generated 2017-Apr-03

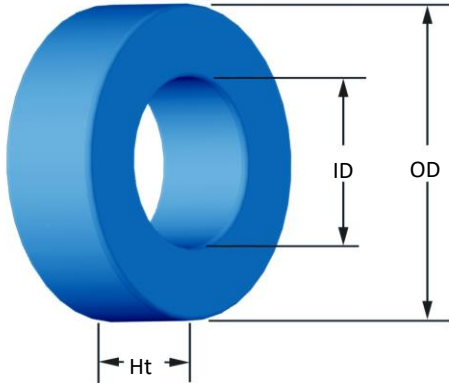

<b>OD</b>	(nom. - bare core) (max. - after coating)	11.18 mm 11.89 mm	0.440 in 0.468 in										
<b>ID</b>	(nom. - bare core) (min. - after coating)	6.35 mm 5.89 mm	0.250 in 0.232 in										
<b>Ht</b>	(nom. - bare core) (max. - after coating)	3.96 mm 4.72 mm	0.156 in 0.186 in										
<b>Mass</b>	(approximate)	1.4 grams											
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	0.0906 cm <sup>2</sup>											
	L <sub>e</sub> - Eff. Mag. Path Length	2.69 cm											
	V <sub>e</sub> - Eff. Core Volume	0.244 cm <sup>3</sup>											
	WA - Min. Eff. Window Area	0.272 cm <sup>2</sup>											
	sa - Surface Area	5.10 cm <sup>2</sup>											
	mlt - mean length per turn	1.84 cm											
<b>Inductance</b>	μ <sub>i</sub> (reference)	125											
	A <sub>L</sub> value (nominal)	53 nH/N <sup>2</sup>											
	Test Winding	N=60, #30 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	0.024 V											
	AL tolerance	±12%											
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=7.985E+09, b=1.378E+09, c=4.041E+06, d=7.891E-15												
	B <sub>pk</sub>	1000 G											
	frequency	50 kHz											
	Core Loss (nominal)	240 mW/cm <sup>3</sup>											
Core Loss (maximum)	276 mW/cm <sup>3</sup>												
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=1.000E-02, b=3.265E-05, c=1.587, d=0.000												
	H <sub>0c</sub>	40 Oe											
	Percent Initial Perm.(nom.)	46.8%											
Percent Initial Perm.(min.)	39.7%												
<b>Coating/Pkg</b>	Coating Type:	Blue Epoxy											
	Voltage Breakdown (min.)	1000 Vrms											
	Limit	0.1 mA, 5 s											
	Package Quantity	9,000 Pcs/Box											
<b>Winding Table</b>	<b>Wire Size</b>	AWG	18	20	22	24	26	28	30	32	34	36	38
		mm	1.000	0.800	0.630	0.500	0.400	0.315	0.250	0.200	0.160	0.125	0.100
	<b>Single Layer Winding</b>	Turns	12	16	20	26	33	42	52	66	83	103	129
		Rdc(Ω)	4.6 m	9.8 m	19.5 m	40.2 m	81.2 m	164.4 m	323.6 m	653.3 m	1.3	2.6	5.1
<b>Full Winding</b>	Turns	13	20	30	47	73	113	174	270	417	646	999	
	Rdc(Ω)	5.0 m	12.2 m	29.2 m	72.7 m	179.6 m	442.2 m	1.1	2.7	6.6	16.2	39.8	

