




Part Number:

SH-080060-2

Revision 20170403 - Generated 2017-Apr-03

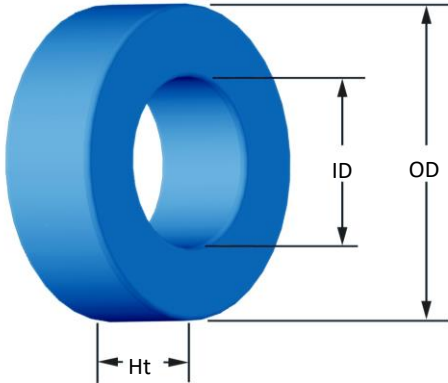

OD	(nom. - bare core) (max. - after coating)	20.32 mm 21.08 mm	0.800 in 0.830 in										
ID	(nom. - bare core) (min. - after coating)	12.70 mm 12.07 mm	0.500 in 0.475 in										
Ht	(nom. - bare core) (max. - after coating)	6.35 mm 7.11 mm	0.250 in 0.280 in										
Mass	(approximate)	6.4 grams											
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.226 cm ²											
	L _e - Eff. Mag. Path Length	5.09 cm											
	V _e - Eff. Core Volume	1.15 cm ³											
	WA - Min. Eff. Window Area	1.14 cm ²											
	sa - Surface Area	15.5 cm ²											
	mlt - mean length per turn	2.93 cm											
Inductance	μ _i (reference)	60											
	A _L value (nominal)	32 nH/N ²											
	Test Winding	N=90, #28 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	0.090 V											
	AL tolerance	±8%											
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=8.801E+08, c=5.421E+06, d=1.033E-14												
	B _{pk}	1000 G											
	frequency	50 kHz											
	Core Loss (nominal)	317 mW/cm ³											
Core Loss (maximum)	365 mW/cm ³												
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=1.000E-02, b=7.724E-06, c=1.612, d=0.000												
	H _{0c}	100 Oe											
	Percent Initial Perm.(nom.)	43.6%											
Percent Initial Perm.(min.)	36.5%												
Coating/Pkg	Coating Type:	Blue Epoxy											
	Voltage Breakdown (min.)	1000 Vrms											
	Limit	0.1 mA, 5 s											
	Package Quantity	1,800 Pcs/Box											
Winding Table	Wire Size	AWG	10	12	14	16	18	20	22	24	26	28	30
		mm	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250
	Single Layer Winding	Turns	10	13	17	22	28	35	44	56	70	88	110
		Rdc(Ω)	1.0 m	2.0 m	4.1 m	8.5 m	17.1 m	34.1 m	68.1 m	137.9 m	274.2 m	548.2 m	1.1
Full Winding	Turns	9	14	22	34	53	82	127	197	305	472	731	
	Rdc(Ω)	0.9 m	2.1 m	5.3 m	13.1 m	32.4 m	79.8 m	196.7 m	485.2 m	1.2	2.9	7.2	

