


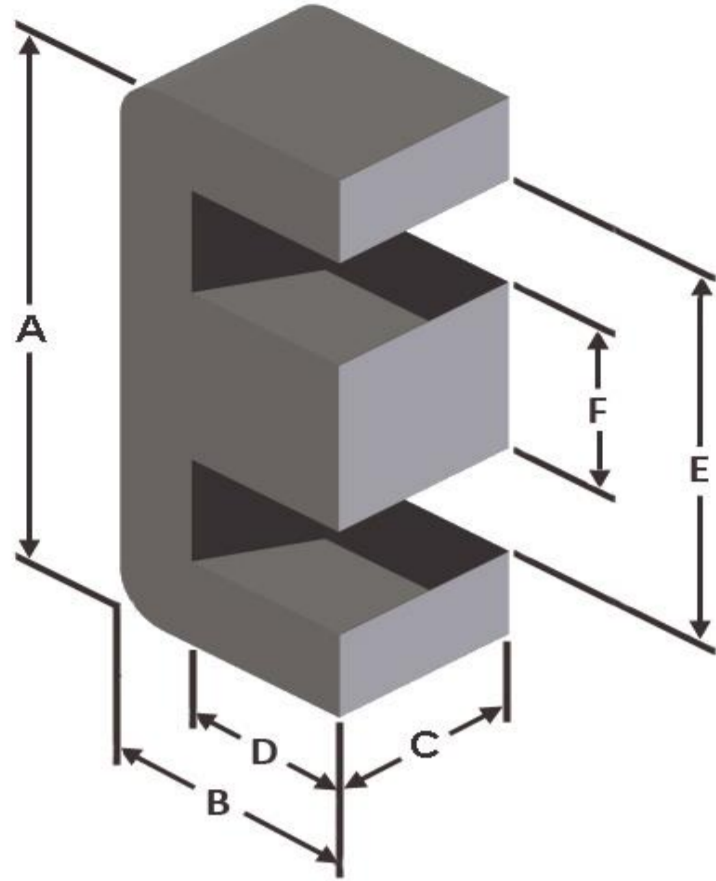
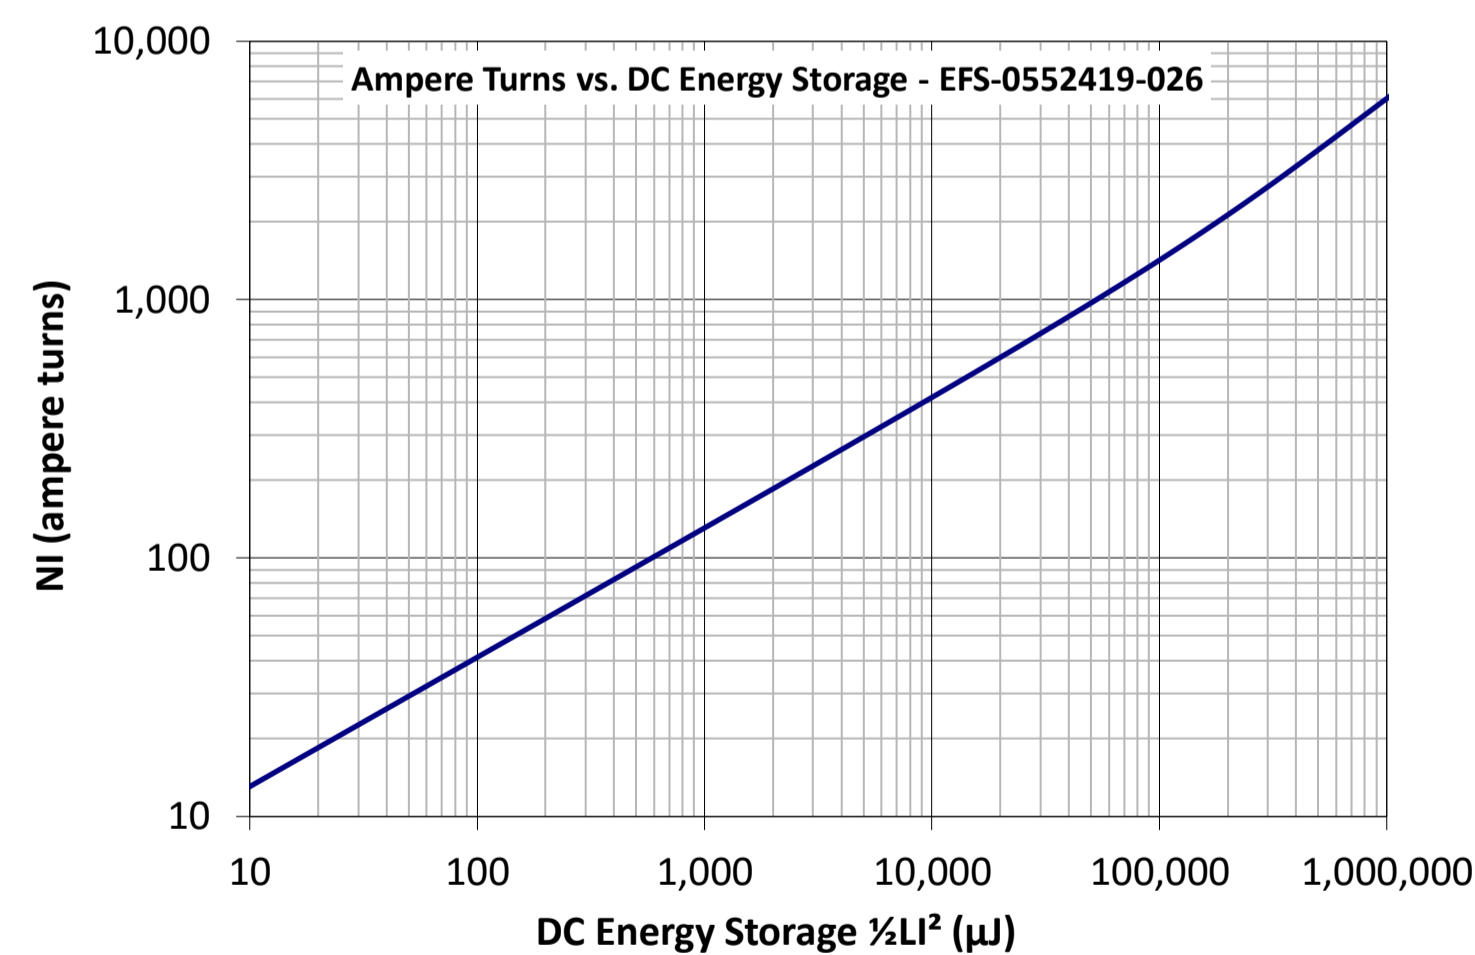


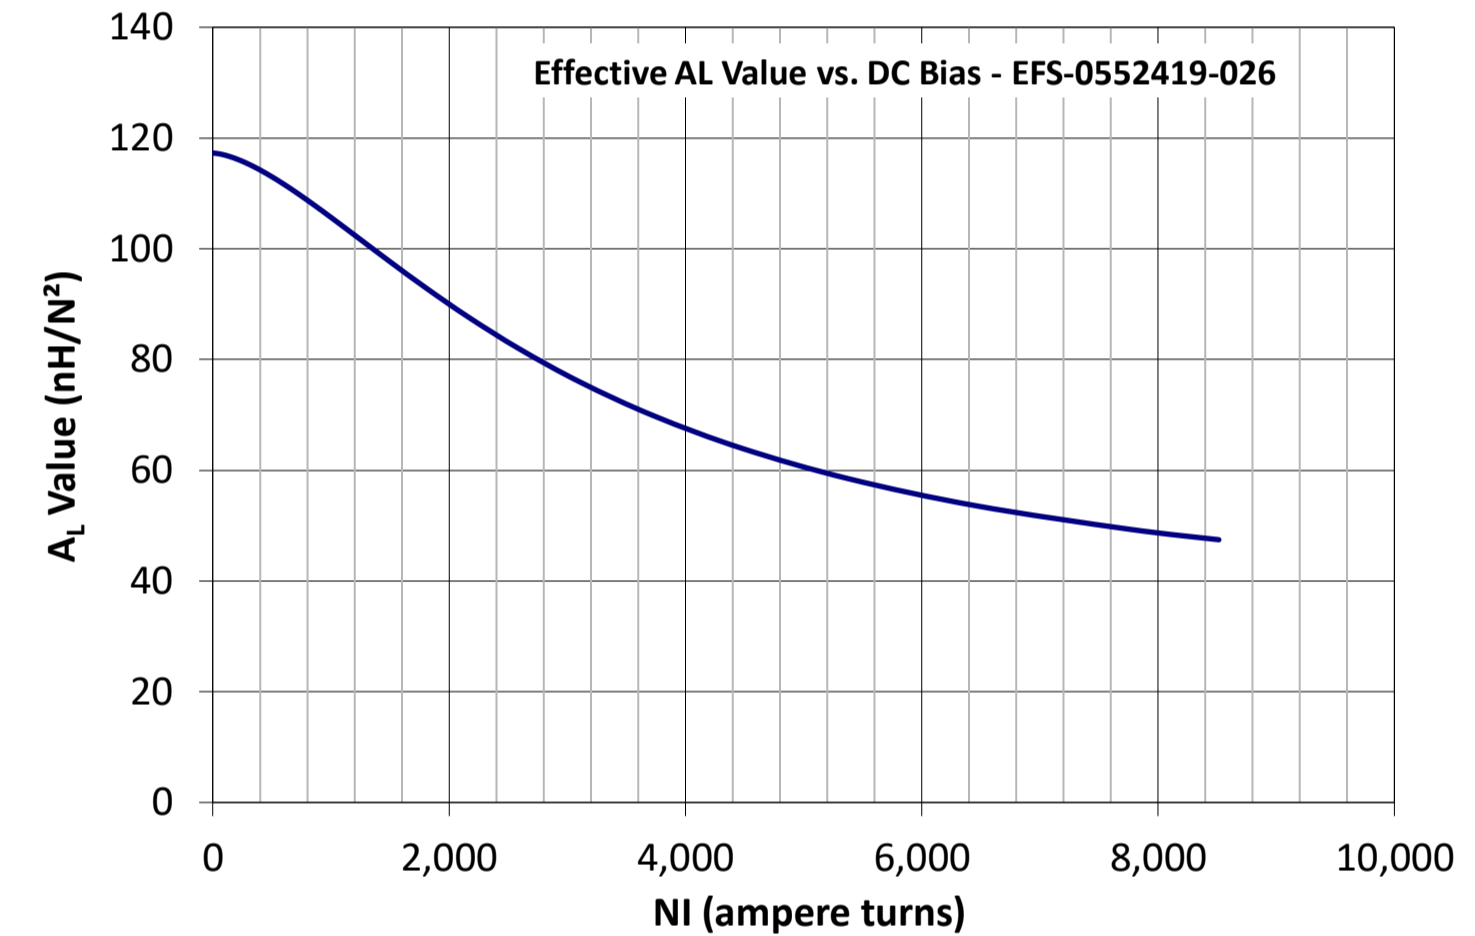

**Part Number:** EFS-0552419-026  
Revision 20170620 - Generated 2017-Jun-20

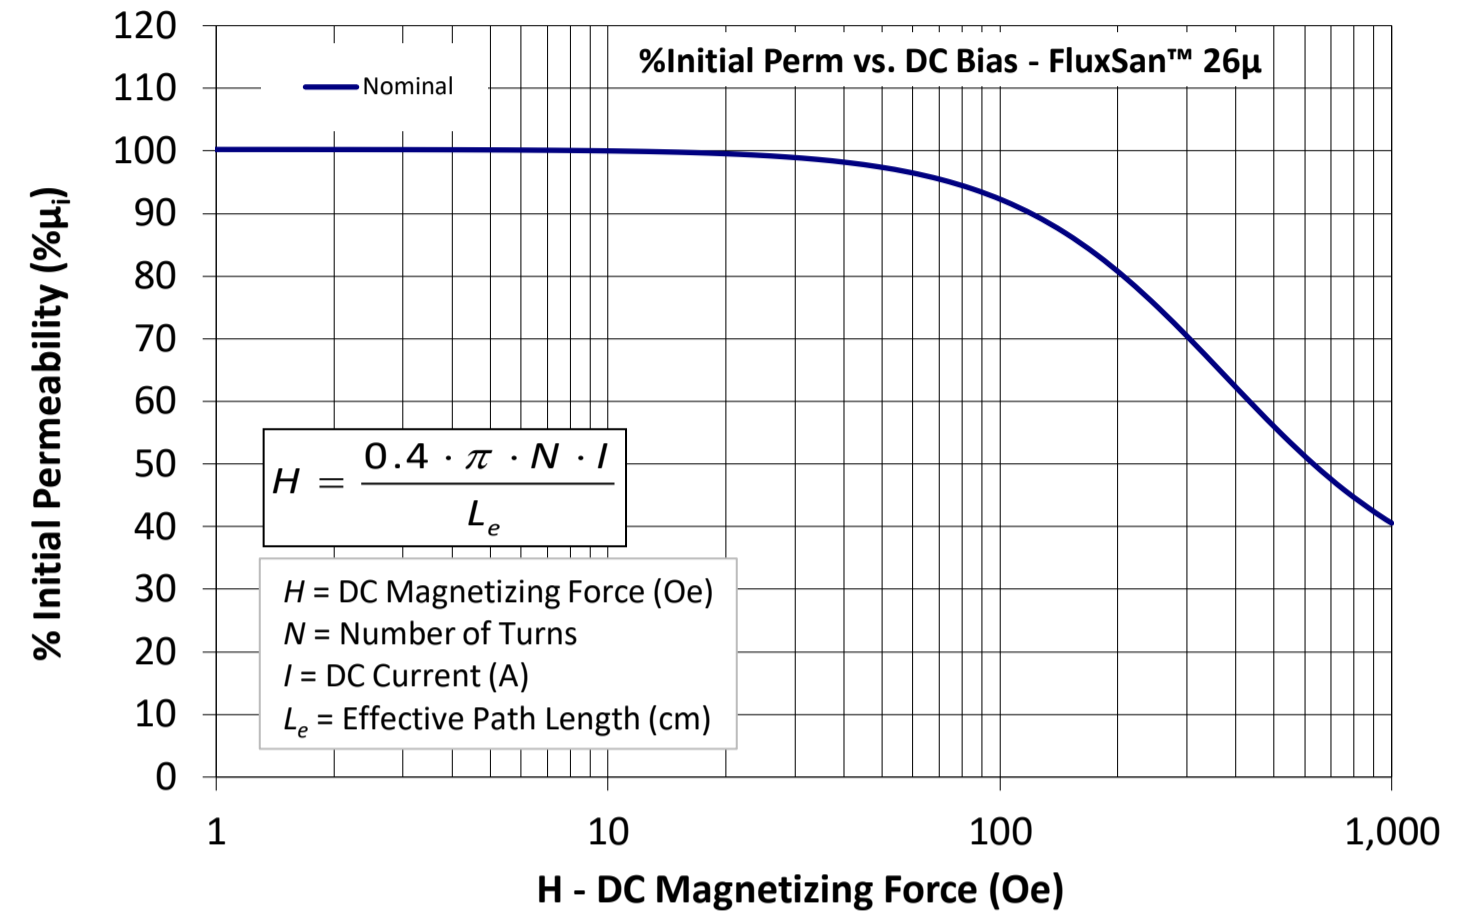

<b>A</b>	54.9 ± 0.81 mm	2.161 ± 0.032 in											
<b>B</b>	23.65 ± 0.41 mm	0.931 ± 0.016 in											
<b>C</b>	18.8 ± 0.41 mm	0.740 ± 0.016 in											
<b>D</b>	14.5 mm (min.)	0.571 in (min.)											
<b>E</b>	37.5 mm (min.)	1.476 in (min.)											
<b>F</b>	16.8 ± 0.33 mm	0.661 ± 0.013 in											
<b>Mass</b>	(approximate)	99 grams/half											
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	3.15 cm <sup>2</sup>											
	L <sub>e</sub> - Eff. Mag. Path Length	10.7 cm											
	V <sub>e</sub> - Eff. Core Volume	33.7 cm <sup>3</sup>											
	WA - Min. Eff. Window Area	2.95 cm <sup>2</sup>											
	sa - Surface Area	104 cm <sup>2</sup>											
	mlt - mean length per turn	11.3 cm											
<b>Inductance</b>	μ <sub>i</sub> (reference)	26											
	A <sub>L</sub> value (nominal)	117 nH/N <sup>2</sup>											
	Test Winding	N=100, #18 AWG											
	Frequency	10 kHz											
	Voltage on Agilent 4284A	1.4 V											
	A <sub>L</sub> tolerance	±8%											
<b>Core Loss</b>	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$												
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and: a=1.00E+06, b=1.70E+08, c=3.12E+06, d=6.33E-14												
	B <sub>pk</sub>	300 G											
	frequency	100 kHz											
	Core Loss (nominal)	225 mW/cm <sup>3</sup>											
Core Loss (maximum)	258 mW/cm <sup>3</sup>												
<b>DC Saturation</b>	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$												
	where H expressed in oersteds, and: a=0.01, b=1.17E-06, c=1.58, d=27.84												
	H <sub>DC</sub>	200 Oe											
	Percent Initial Perm (nom.)	80.8%											
Percent Initial Perm (min.)	76.4%												
<b>Coating/Pkg</b>	Coating Type:	None											
	Voltage Breakdown (min.)	N/A											
	Limit	N/A											
	Package Quantity	96 Halves/Box											
<b>Winding Table</b>	<b>Wire Size</b>	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	<b>Full Winding</b>	Turns	16	25	38	59	91	141	219	339	524	812	1,256
		Rdc(Ω)	3.7 m	9.2 m	22.3 m	54.9 m	134.8 m	332.1 m	820.4 m	2.0	5.0	12.2	30.1

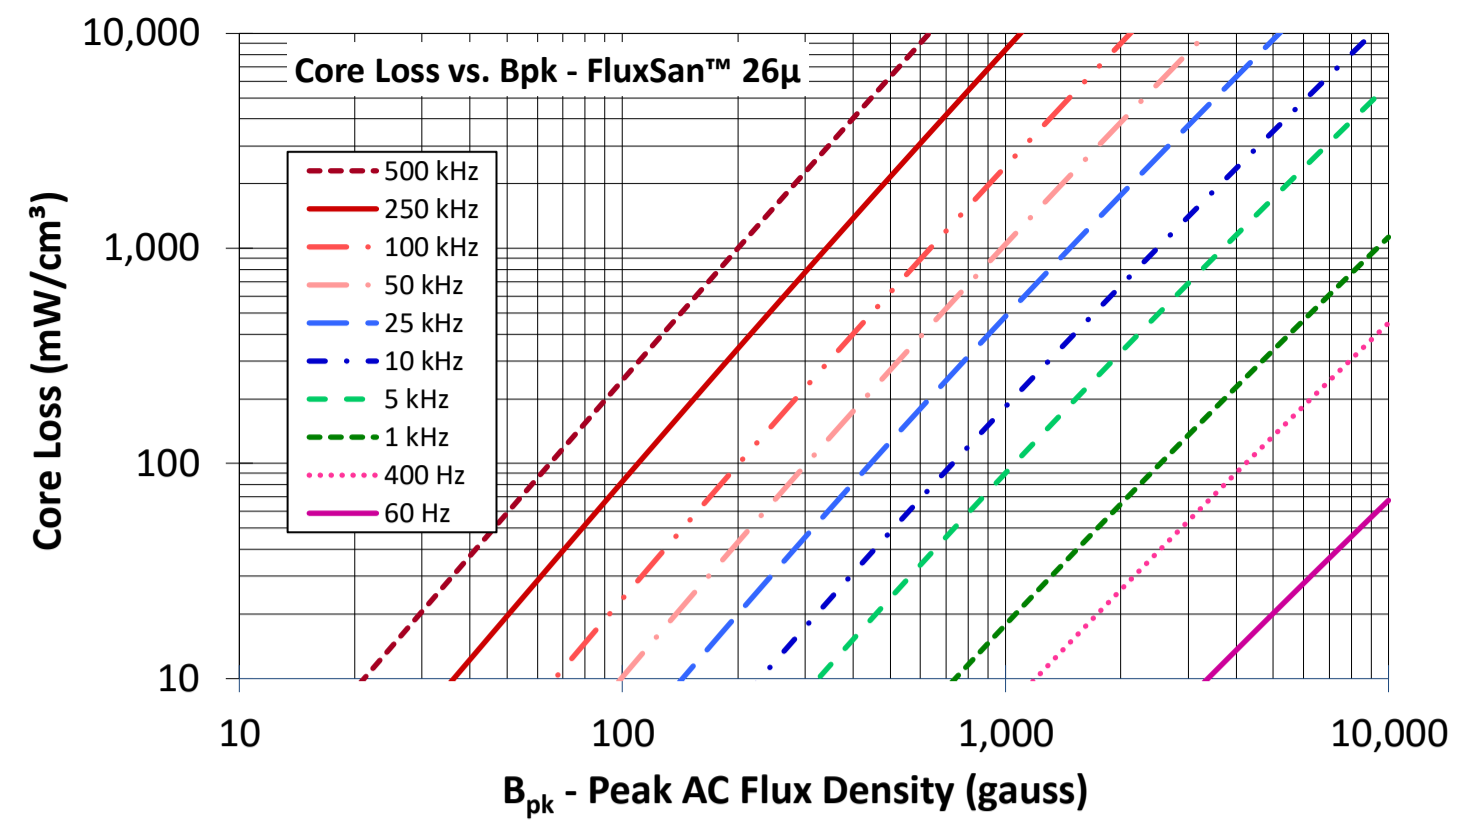

**Handling and Storage:** Cores should be stored in the original unopened packaging between -10°C and +50°C and less than 60% relative humidity. After the original packaging is opened, the cores should be stored between -8°C and +25°C less than 30% relative humidity. Gloves should be used when handling uncoated cores. The cores should also be sheltered from rain, moisture, salt water, salt air, plasters, ashes, sulfur, sulfur dioxide, ammonia sulfates, soils, acids, metals shavings, and solvents.

**Operating Temperature:** Cores can be used continuously at operating temperatures between -60°C and +200°C.

RoHS 2.0, REACH and ISO (TS16949, ISO 9001, ISO 14001) compliant. Statements available for download at [www.micrometalsapc.com](http://www.micrometalsapc.com).