




Part Number: FS-018040-8

Revision 20190529 - Generated 2019-May-29

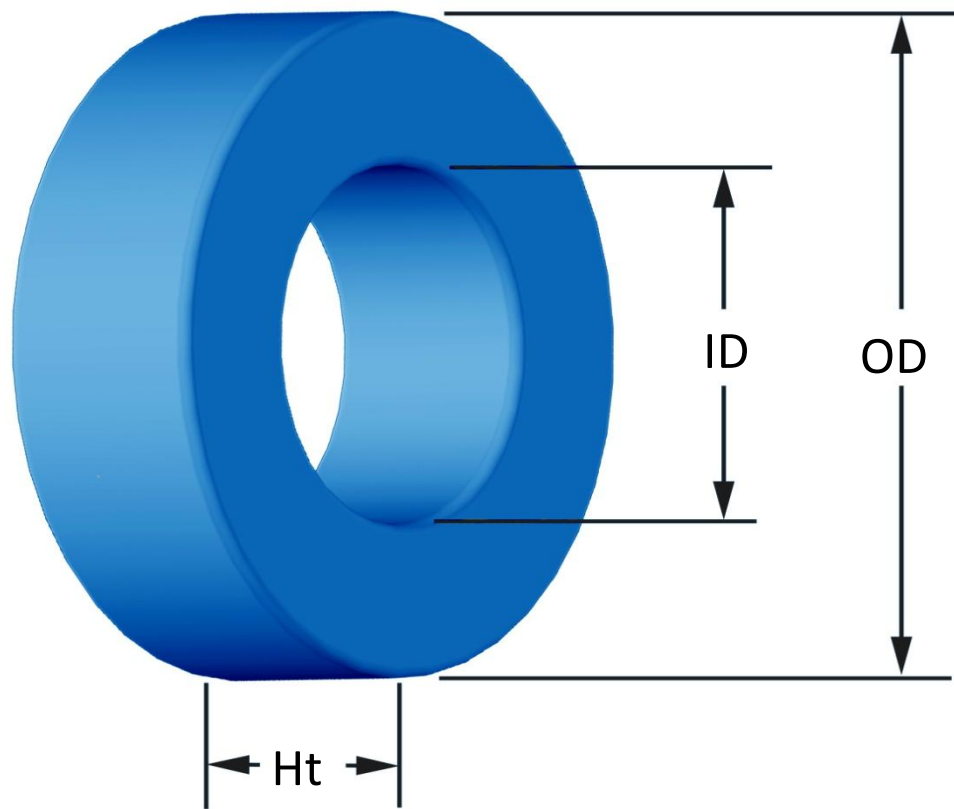

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	4.65 mm 5.21 mm	0.183 in 0.205 in
ID	(nom. - bare core) (min.)	2.36 mm 1.93 mm	0.093 in 0.076 in
HT	(nom. - bare core) (max.)	2.54 mm 3.30 mm	0.100 in 0.130 in
Mass	(approximate)	0.20 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.0285 cm ²	
	L _e - Eff. Mag. Path Length	1.06 cm	
	V _e - Eff. Core Volume	0.0302 cm ³	
	WA - Min. Eff. Window Area	0.0293 cm ²	
	sa - Surface Area	1.15 cm ²	
Inductance	μ _i (reference)	40	
	A _L value (nominal)	13 nH/N ²	
Core Loss	Test Winding	N=30, #32 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.004 V	
	AL tolerance	±8%	
	Core Loss(mW/cm ³)= $\frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=3.071E+08, c=3.524E+06, d=5.634E-14	
DC Saturation	B _{pk}	1000 G	
	frequency	50 kHz	
	Core Loss (nominal)	780 mW/cm ³	
	Core Loss (maximum)	897 mW/cm ³	
Coating/Pkg	%μ _i = $\frac{1}{a + b \cdot H^c} + d$	where H expressed in oersteds, and: a=1.000E-02, b=6.314E-08, c=2.151, d=0.000	
	H _{DC}	200 Oe	
	Percent Initial Perm(nom.)	64.0%	
	Percent Initial Perm(min.)	54.5%	
Winding Table	Coating Type:	Parylene N	
	Voltage Breakdown (min.)	500 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	27,000 Pcs/Box	

Winding Table	Wire Size	AWG	28	30	32	34	36	38	40	42	44	-	-
		mm	0.315	0.250	0.200	0.160	0.125	0.100	0.080	0.063	0.050	-	-
	Single Layer	Turns	12	15	20	25	32	40	51	64	81	-	-
		Rdc(Ω)	27.7 m	55.1 m	116.8 m	232.1 m	472.6 m	939.5 m	1.9	3.8	7.7	-	-
Full Winding	Turns	12	19	29	45	69	107	166	257	398	-	-	
	Rdc(Ω)	27.7 m	69.8 m	169.3 m	417.9 m	1.0	2.5	6.2	15.3	37.6	-	-	

