




Part Number: **HF-306060-2**

Revision 20191114 - Generated 2019-Nov-14

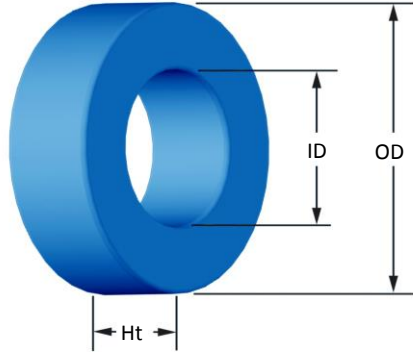

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	77.80 mm 78.94 mm	3.063 in 3.108 in
ID	(nom. - bare core) (min.)	39.34 mm 38.34 mm	1.549 in 1.509 in
HT	(nom. - bare core) (max.)	25.85 mm 26.85 mm	1.018 in 1.057 in
Mass	(approximate)	560 grams	
Magnetic Dimensions	A_e - Eff. Mag. Cross Section	4.78 cm ²	
	L_e - Eff. Mag. Path Length	17 cm	
	V_e - Eff. Core Volume	81.5 cm ³	
	W_A - Min. Eff. Window Area	11.5 cm ²	
	s_a - Surface Area	211 cm ²	
	mlt - mean length per turn	11.3 cm	
Inductance	μ_i (reference)	60	
	A_L value (nominal)	205 nH/N ²	
	Test Winding	N=120, #18 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	2.5 V	
	A_L tolerance	±8%	
Core Loss	Core Loss(mW/cm ³): $\frac{f}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B_{pk} expressed in gauss, f expressed in hertz, and: $a=8.579E+09$, $b=7.879E+08$, $c=1.650E+06$, $d=1.019E-13$		
	B_{pk}	1000 G	
	frequency	50 kHz	
	Core Loss (nominal)	651 mW/cm ³	
	Core Loss (maximum)	748 mW/cm ³	
DC Saturation	$\% \mu_i \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: $a=1.000E-02$, $b=7.648E-07$, $c=1.888$, $d=0.000$		
	H_{DC}	150 Oe	
	Percent Initial Perm.(nom.)	50.4%	
	Percent Initial Perm.(min.)	41.9%	
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	18 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	30	38	47	60	75	94	118	147	184	229	286
		Rdc(Ω)	7.0 m	14.1 m	27.7 m	56.3 m	111.9 m	223.1 m	445.5 m	882.6 m	1.8	3.5	6.9
Full Winding	Turns	60	94	145	224	347	537	831	1,286	1,990	3,080	4,767	
	Rdc(Ω)	14.0 m	34.9 m	85.6 m	210.2 m	517.9 m	1.3	3.1	7.7	19.0	46.8	115.1	

