




Part Number: OP-306125-2

Revision 20191114 - Generated 2019-Nov-14

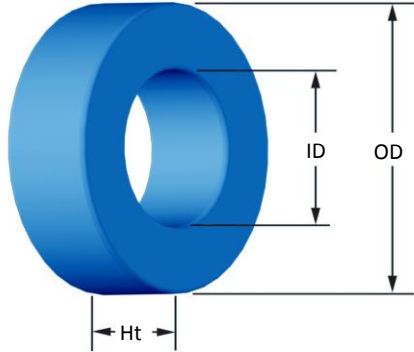

(If coated, Max./Min. includes coating)

OD	(nom. - bare core)	77.80 mm	3.063 in
	(max.)	78.94 mm	3.108 in
ID	(nom. - bare core)	39.34 mm	1.549 in
	(min.)	38.34 mm	1.509 in
HT	(nom. - bare core)	25.85 mm	1.018 in
	(max.)	26.85 mm	1.057 in
Mass	(approximate)	590 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	4.78 cm ²	
	L _e - Eff. Mag. Path Length	17 cm	
	V _e - Eff. Core Volume	81.5 cm ³	
	WA - Min. Eff. Window Area	11.5 cm ²	
	sa - Surface Area	211 cm ²	
	mlt - mean length per turn	11.3 cm	
Inductance	μ _i (reference)	125	
	A _l value (nominal)	425 nH/N ²	
	Test Winding	N=120, #18 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	2.5 V	
	AL tolerance	±8%	
Core Loss	Core Loss(mW/cm ³): $\frac{f}{Bpk^3} + \frac{f}{Bpk^{2.3}} + \frac{c}{Bpk^{1.65}} + d \cdot Bpk^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=3.954E+09, b=2.598E+09, c=3.654E+06, d=5.000E-14		
	B _{pk}	1000 G	
	frequency	50 kHz	
	Core Loss (nominal)	259 mW/cm ³	
Core Loss (maximum)	298 mW/cm ³		
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.000E-02, b=3.545E-06, c=1.863, d=0.000		
	H _{DC}	40 Oe	
	Percent Initial Perm.(nom.)	74.5%	
Percent Initial Perm.(min.)	67.5%		
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	18 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	30	38	47	60	75	94	118	147	184	229	286
		Rdc(Ω)	7.0 m	14.1 m	27.7 m	56.3 m	111.9 m	223.1 m	445.5 m	882.6 m	1.8	3.5	6.9
Full Winding	Turns	60	94	145	224	347	537	831	1,286	1,990	3,080	4,767	
	Rdc(Ω)	14.0 m	34.9 m	85.6 m	210.2 m	517.9 m	1.3	3.1	7.7	19.0	46.8	115.1	

