




Part Number: **PC126-402C**
 Revision 20190524 - Generated 2019-May-30



A	100.00 ± 0.30 mm	3.937 ± 0.012 in
B	87.00 ± 0.30 mm	3.425 ± 0.012 in
C	50.50 ± 0.30 mm	1.988 ± 0.012 in
D	41.00 ± 0.30 mm	1.614 ± 0.012 in
E	41.00 ± 0.30 mm	1.614 ± 0.012 in
F	35.00 ± 0.30 mm	1.378 ± 0.012 in
G	8.50 ± 0.30 mm	0.335 ± 0.008 in
H	1.57 Typical	0.062 Typical
Mass	(approximate)	970 grams/half
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	15.5 cm ²
	L _e - Eff. Mag. Path Length	25.7 cm
	V _e - Eff. Core Volume	386 cm ³
	WA - Min. Eff. Window Area	18.6 cm ²
	sa - Surface Area	396 cm ²
	mlt - mean length per turn	20.1 cm
Inductance	μ _i (reference)	10
	A _L value (nominal)	95 nH/N ²
	Test Winding	N=100, #14 AWG
	Frequency	10 kHz
	Voltage on Agilent 4284A	5.0 V
	A _L tolerance	±5%
Core Loss	Core Loss(mW/cm ³)= $\frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$	
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=4.00E+09, b=3.00E+08, c=2.70E+06, d=9.60E-16	
	B _{pk}	140 G
	frequency	100 kHz
	Core Loss (nominal)	18 mW/cm ³
Core Loss (maximum)	20 mW/cm ³	
DC Saturation	%μ _i = $\frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and: a=1.00E-02, b=1.83E-07, c=1.46, d=0.00	
	H _{DC}	200 Oe
	Percent Initial Perm(nom.)	95.9%
Percent Initial Perm(min.)	94.8%	
Coating/Pkg	Coating Type:	None
	Voltage Breakdown (min.)	N/A
	Limit	N/A
	Package Quantity	6 Halves/Box

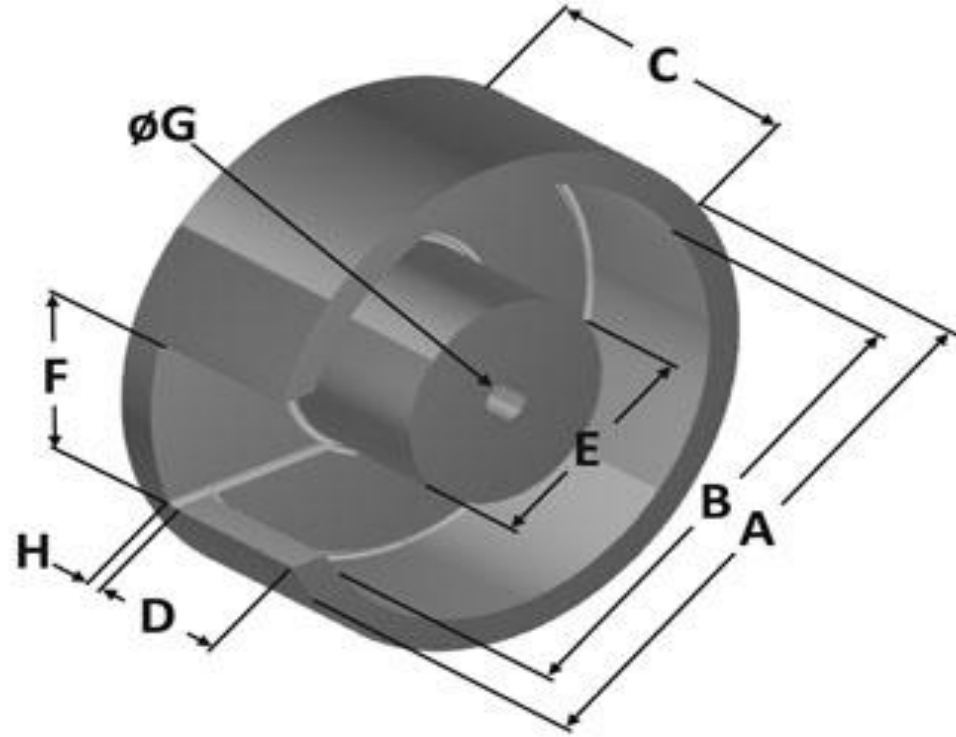