




**Part Number:** **T20-12**  
Revision 20160713 - Generated 2016-Aug-15

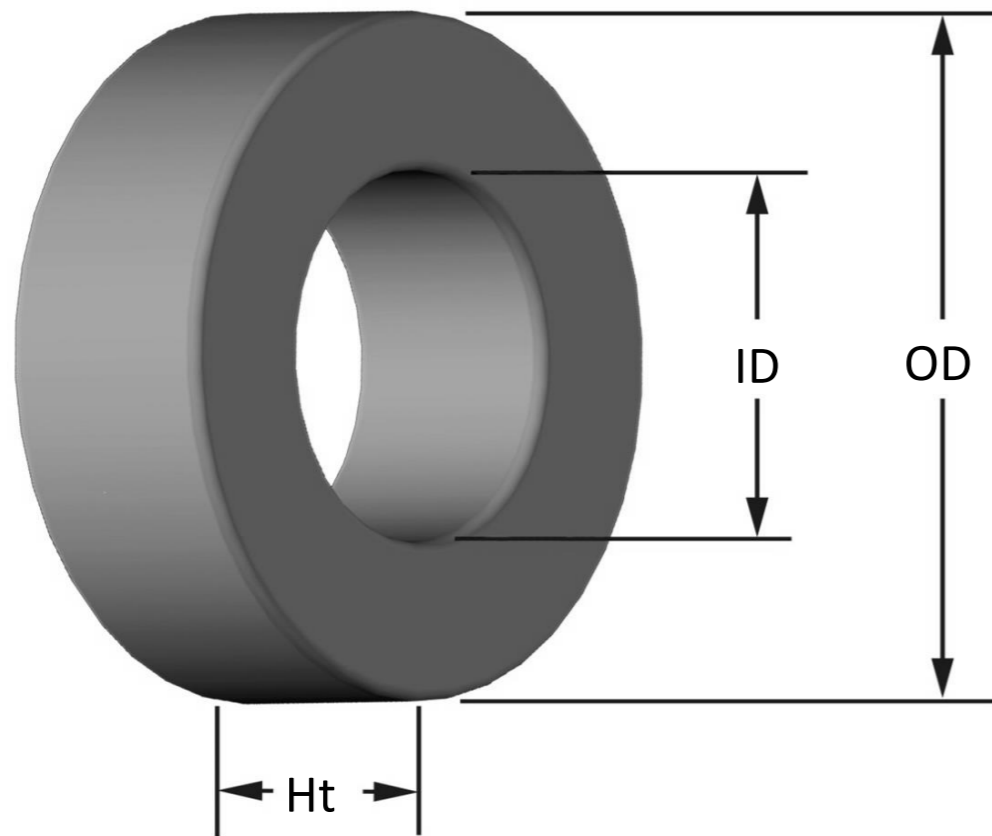

<b>OD</b>	(nom. - bare core)	5.08 mm	0.200 in
	(max. - after coating)	5.33 mm	0.210 in
<b>ID</b>	(nom. - bare core)	2.24 mm	0.088 in
	(min. - after coating)	1.98 mm	0.078 in
<b>Ht</b>	(nom. - bare core)	1.78 mm	0.070 in
	(max. - after coating)	2.03 mm	0.080 in
<b>Mass</b>	(approximate)	#N/A	
<b>Magnetic Dimensions</b>	A <sub>e</sub> - Eff. Mag. Cross Section	0.0230 cm <sup>2</sup>	
	L <sub>e</sub> - Eff. Mag. Path Length	1.15 cm	
	V <sub>e</sub> - Eff. Core Volume	0.0260 cm <sup>3</sup>	
	WA - Min. Eff. Window Area	0.0308 cm <sup>2</sup>	
	sa - Surface Area	0.962 cm <sup>2</sup>	
	mlt - mean length per turn	0.841 cm	
<b>Inductance</b>	μ <sub>i</sub> (reference)	#N/A	
	A <sub>L</sub> value (nominal)	1 nH/N <sup>2</sup>	
	Test Winding	N=50, #36 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.005 V	
	A <sub>L</sub> tolerance	±5%	
<b>Core Loss</b>	Core Loss(mW/cm <sup>3</sup> )= $\frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B <sub>pk</sub> expressed in gauss, f expressed in hertz, and:	#N/A	
	B <sub>pk</sub>	#N/A	
	frequency	#N/A	
	Core Loss (nominal)	#N/A	
Core Loss (maximum)	#N/A		
<b>DC Saturation</b>	%μ <sub>i</sub> = $\frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and:	#N/A	
	H <sub>DC</sub>	#N/A	
	Percent Initial Perm.(nom.)	#N/A	
<b>Coating/Pkg</b>	Coating Type:	Parylene C	
	Voltage Breakdown (min.)	500 Vrms, 60Hz	
	Limit	0.1 mA, 5 s	
	Package Quantity	100,000 Pcs/Box	

<b>Winding Table</b>	<b>Wire Size</b>	AWG	28	30	32	34	36	38	40	42	44	#N/A	#N/A
		mm	0.315	0.250	0.200	0.160	0.125	0.100	0.080	0.063	0.050	#N/A	#N/A
	<b>Single Layer</b>	Turns	12	16	20	26	33	42	52	66	83	#N/A	#N/A
		Rdc(Ω)	21.5 m	45.5 m	90.5 m	187.2 m	377.8 m	764.7 m	1.5	3.0	6.1	#N/A	#N/A
<b>Full Winding</b>	Turns	13	20	30	47	73	113	175	271	419	#N/A	#N/A	
	Rdc(Ω)	23.3 m	56.9 m	135.8 m	338.3 m	835.7 m	2.1	5.1	12.5	30.7	#N/A	#N/A	

