


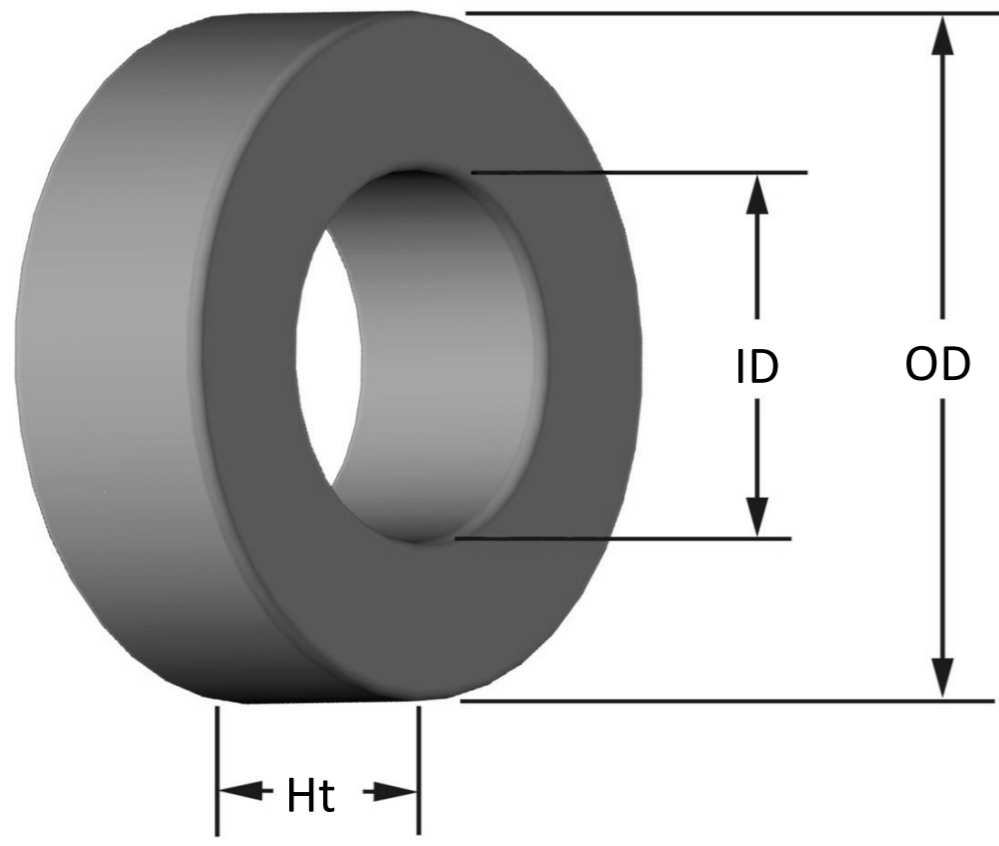
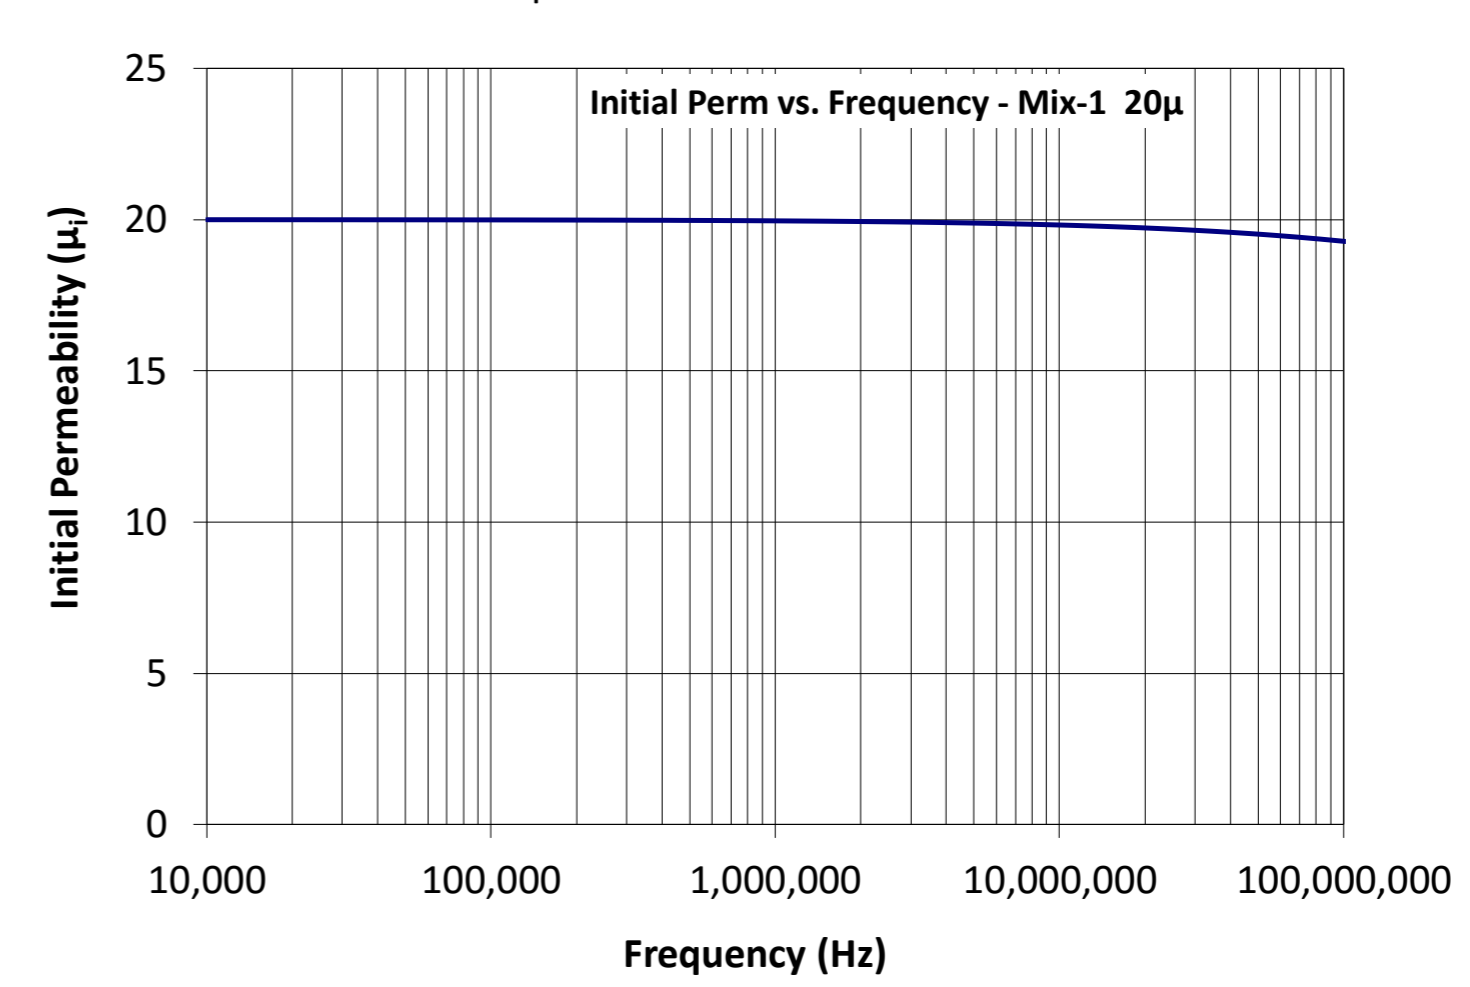


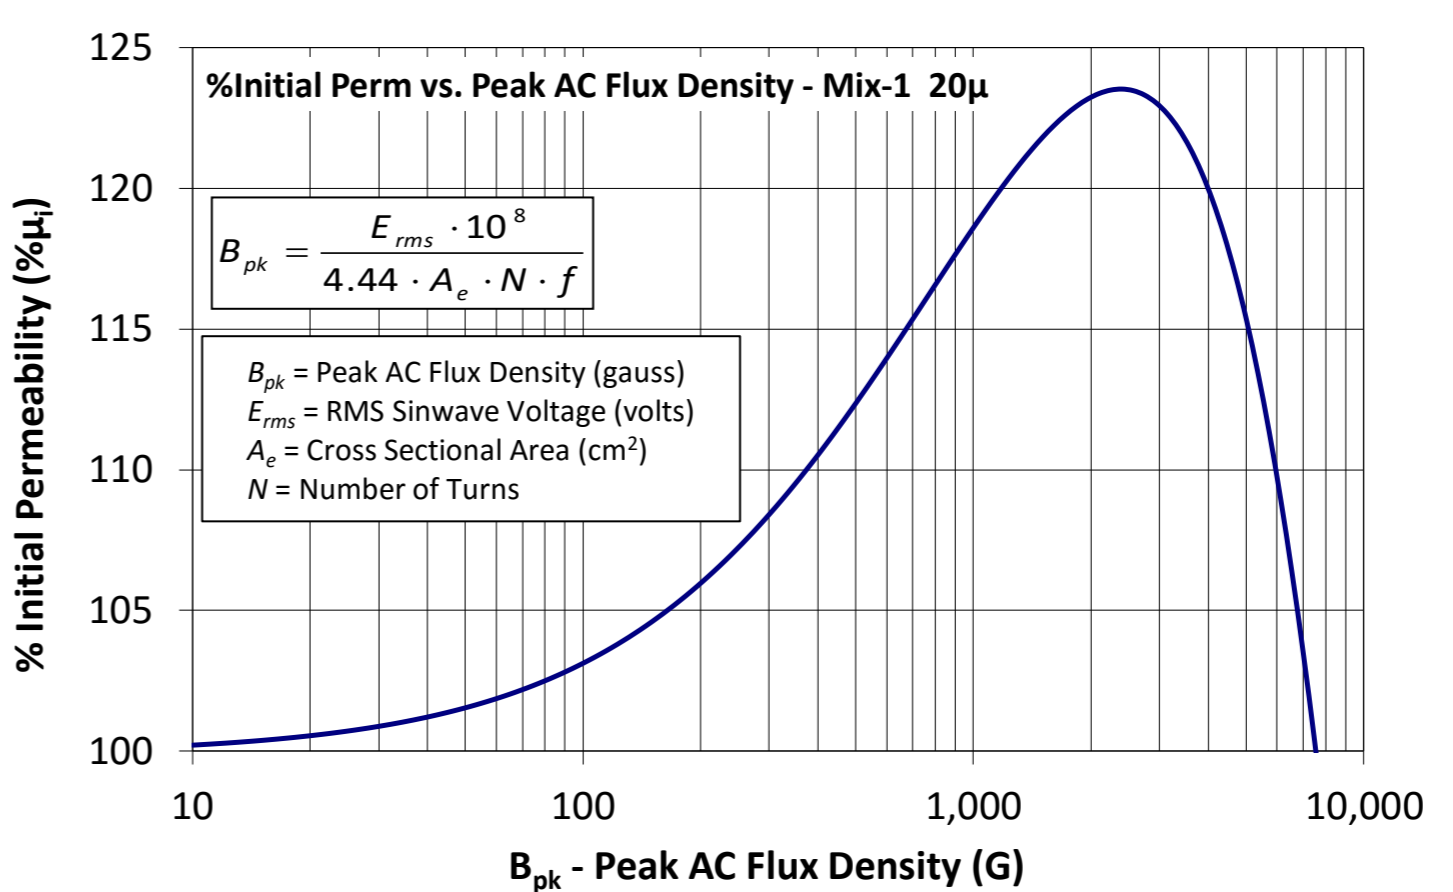

Part Number: **T7-1**
Revision 20160713 - Generated 2016-Aug-15

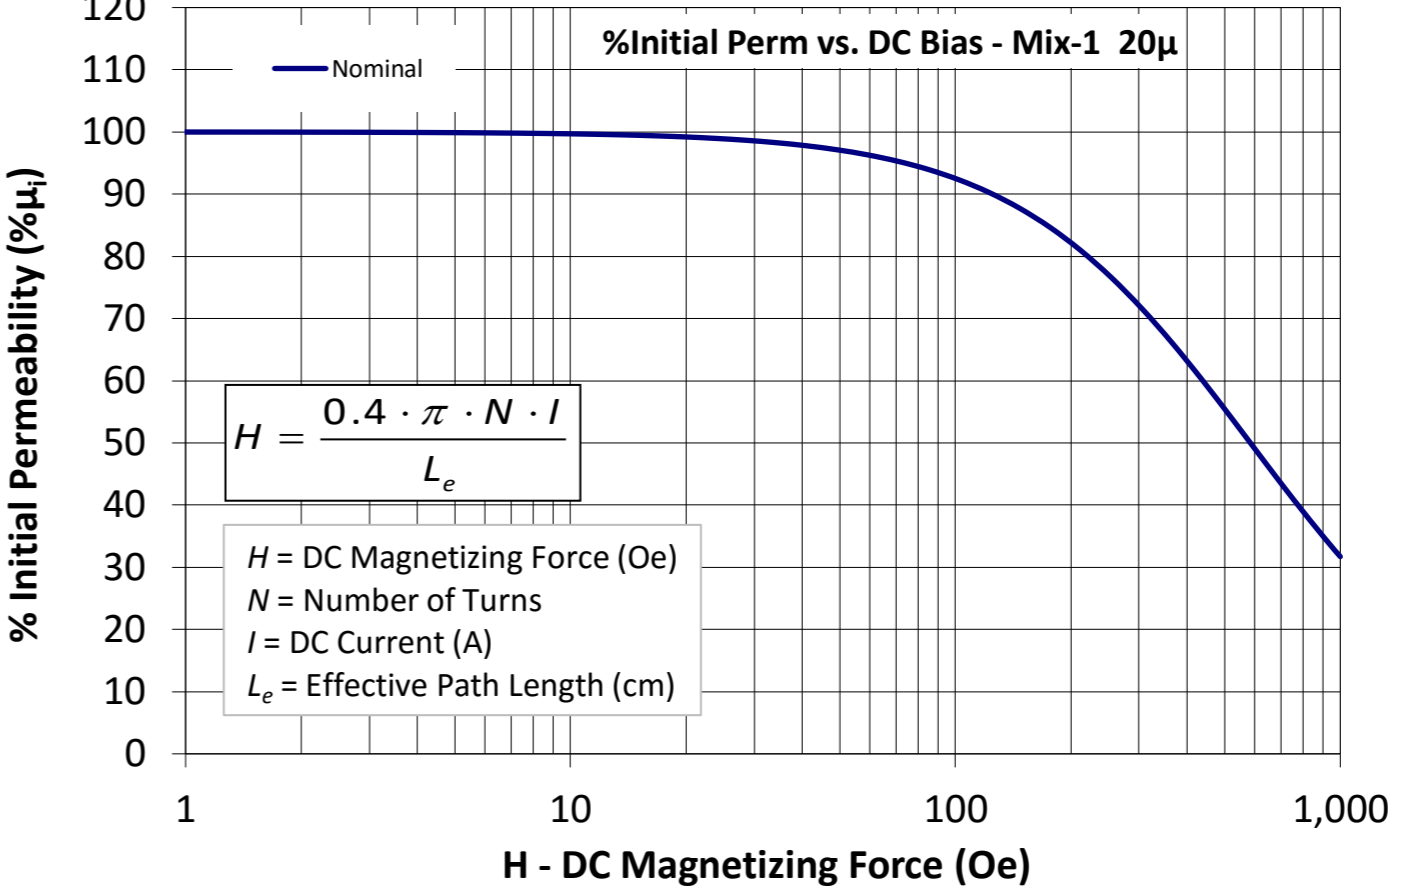

OD	(nom. - bare core) (max. - after coating)	1.78 mm 1.91 mm	0.070 in 0.075 in
ID	(nom. - bare core) (min. - after coating)	0.89 mm 0.76 mm	0.035 in 0.030 in
Ht	(nom. - bare core) (max. - after coating)	0.76 mm 0.89 mm	0.030 in 0.035 in
Mass	(approximate)	0.01 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.00350 cm ²	
	L _e - Eff. Mag. Path Length	0.420 cm	
	V _e - Eff. Core Volume	0.00150	
	WA - Min. Eff. Window Area	0.00460 cm ²	
	sa - Surface Area	0.135 cm ²	
	mlt - mean length per turn	0.330 cm	
Inductance	μ _i (reference)	20	
	A _L value (nominal)	3.5 nH/N ²	
	Test Winding	N=20, #40 AWG	
	Frequency	10 kHz	
	Voltage on Agilent 4284A	0.0003 V	
	A _L tolerance	±10%	
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{f}{\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.90E+09, b=2.00E+08, c=9.00E+05, d=4.30E-15		
	B _{pk}	140 G	
	frequency	100 kHz	
	Core Loss (nominal)	31 mW/cm ³	
Core Loss (maximum)	36 mW/cm ³		
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.00E-02, b=1.14E-06, c=1.43, d=0.00		
	H _{DC}	200 Oe	
	Percent Initial Perm (nom.)	82.2%	
Percent Initial Perm (min.)	78.0%		
Coating/Pkg	Coating Type:	Parylene C	
	Voltage Breakdown (min.)	500 Vrms, 60Hz	
	Limit	0.1 mA, 5 s	
	Package Quantity	250,000 Pcs/Box	

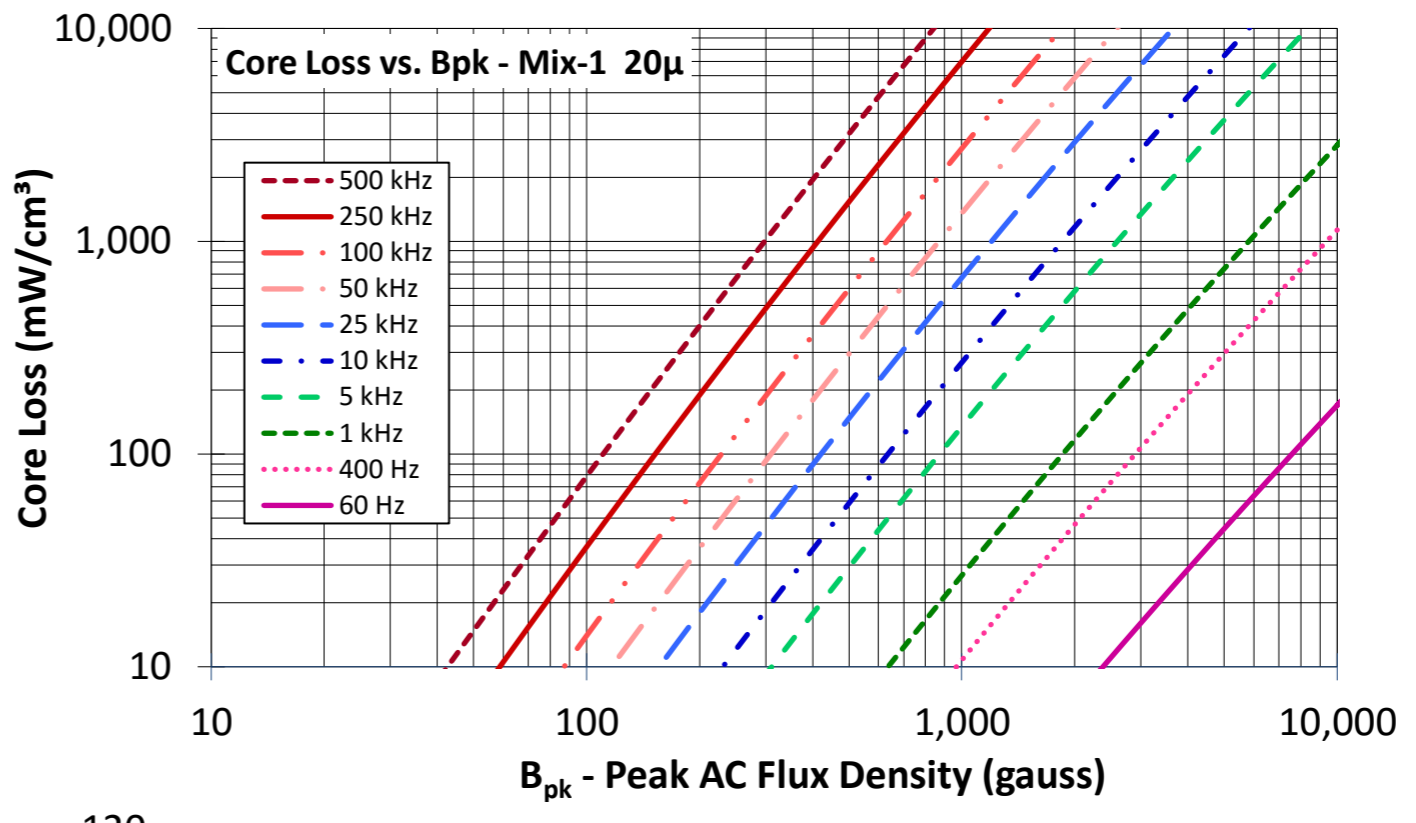

Winding Table	Wire Size	AWG	36	38	40	42	44	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
		mm	0.125	0.100	0.080	0.063	0.050	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
	Single Layer	Turns	11	14	18	24	30	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
		Rdc(Ω)	49.5 m	100.1 m	204.7 m	434.1 m	863.0 m	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A
Full Winding	Turns	11	17	26	40	62	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	
	Rdc(Ω)	49.5 m	121.6 m	295.7 m	723.5 m	1.8	#N/A	#N/A	#N/A	#N/A	#N/A	#N/A	